

This Page Is Inserted by IFW Operations  
and is not a part of the Official Record

## **BEST AVAILABLE IMAGES**

Defective images within this document are accurate representations of the original documents submitted by the applicant.


Defects in the images may include (but are not limited to):

- BLACK BORDERS
- TEXT CUT OFF AT TOP, BOTTOM OR SIDES
- FADED TEXT
- ILLEGIBLE TEXT
- SKEWED/SLANTED IMAGES
- COLORED PHOTOS
- BLACK OR VERY BLACK AND WHITE DARK PHOTOS
- GRAY SCALE DOCUMENTS

**IMAGES ARE BEST AVAILABLE COPY.**

**As rescanning documents *will not* correct images,  
please do not report the images to the  
Image Problem Mailbox.**

**THIS PAGE BLANK (US 70)**



Europäisches Patentamt  
European Patent Office  
Office européen des brevets



(11) EP 0 967 604 A1

(12) EUROPEAN PATENT APPLICATION

(43) Date of publication:  
29.12.1999 Bulletin 1999/52

(51) Int Cl.<sup>6</sup> G11B 20/12, G11B 27/32

(21) Application number: 99304944.4

(22) Date of filing: 23.06.1999

(84) Designated Contracting States:  
AT BE CH CY DE DK ES FI FR GB GR IE IT LI LU  
MC NL PT SE  
Designated Extension States:  
AL LT LV MK RO SI

- Oh, Young-nam  
Sungnam-city, Kyungki-do (KR)
- Chung, Tae-yun  
Gwacheon-city, Kyungki-do (KR)
- Kang, Jung-suk  
Seoul (KR)
- Park, Pan-gie, 422-202 Chungmyung Maeul  
Paldal-gu, Suwon-city, Kyungki-do (KR)

(30) Priority: 24.06.1998 KR 9823992  
02.10.1998 KR 9841757

(71) Applicant: SAMSUNG ELECTRONICS CO., LTD.  
Suwon-City, Kyungki-do (KR)

(74) Representative: Robinson, Ian Michael et al  
Appleyard Lees,  
15 Clare Road  
Halifax HX1 2HY (GB)


(72) Inventors:  
• Moon, Seong-jin  
Paldal-gu, Suwon-city, Kyungki-do (KR)

(54) Recording medium for storing still pictures, and a recording and/or reproducing method and apparatus therefor

(57) A recordable and/or rewriteable recording medium for storing still picture data, and recording and/or reproducing method and apparatus therefor are provided. The recording medium stores still picture group information (GVOB) for grouping a plurality of still pictures in order to manage the still pictures at a group level, and stores audio group information (GAOB) for grouping ad-

ditional audio data added to the still picture data after the still picture data are recorded. Therefore, large-capacity still picture data and additional audio data added thereto can be recorded using the minimum management information. During reproduction, data can be displayed and edited in units of the respective still pictures. Also, it is possible to cope easily with after-recording of the audio data.

FIG. 6

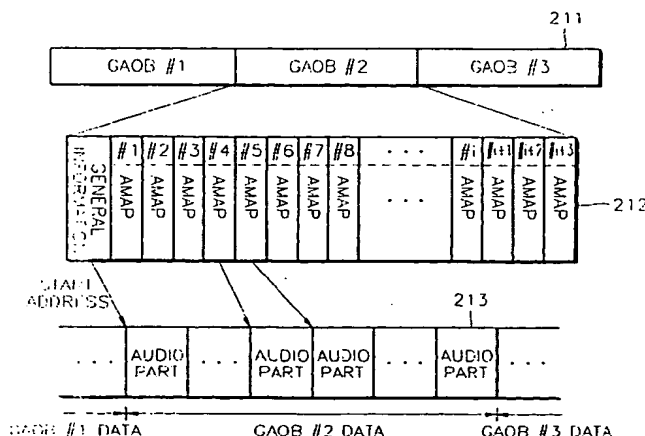

## Description

**[0001]** The present invention relates in general to recording and/or reproducing audio and/or video data using a rewriteable recording medium such as a DVD disk, and more particularly to a recording medium for storing and effectively processing still picture data and additional audio data added thereto, and recording and/or reproducing method and apparatus therefor.

**[0002]** Figure 1 shows a connection structure for various kinds of information in a moving picture and moving picture data, in recording/reproducing audio and/or video data on a recordable and/or rewriteable recording medium, specifically, a digital versatile disk (DVD), and more precisely, it illustrates the relationship between program chain (PGC) information 11 for treating data logically, moving picture information 12 consisting of video object (VOB) information, and a moving picture data file 13 in which actually compressed audio/video (A/V) data are recorded in VOB units.

**[0003]** First, terms used throughout the specification will now be described. Supposing a movie was recorded in first and second parts, the overall movie is a program chain (PGC) and the first and second parts are programs. Also, each program can be defined by further dividing the same into several cells called sub-units. The information in each cell can wholly or partially define a video object (VOB). In such an event, each cell is used as a basic accessing unit during reproduction, and the program and PGC are only the information for connectivity between a plurality of cells.

**[0004]** Also, since data is actually sub-divided into video object units (VOBUs) and recorded in a moving picture data file, the VOB information consists of various kinds of information relating to the VOB data, that is, VOB #1, VOB #2, ..., and the VOB data in the moving picture data file is accessed by the VOB information. Here, the VOB data is used as a random access unit of a disk recording/reproducing apparatus. The VOB is based on a single GOP (Group of Pictures) in the case of an MPEG (Moving Picture Experts Group) video, and audio data corresponding to video data is collected, that is, A/V data is multiplexed into sectors, to constitute a VOB.

**[0005]** The data format shown in Figure 1 is concerned with the moving picture, in which the unit of actual data, the VOB, comprises moving picture data for a fixed period of time. Synchronization or encoding of A/V signals is performed in units of VOBs. However, in the case of a still picture, each VOB constitutes a still picture. When a VOB is designated in a cell structure, a cell is necessary for each still picture. Thus, as more still pictures are recorded, more information is added.

**[0006]** Generally, data errors may be generated if data is recorded on a recordable disk a predetermined number of times. Thus, there is a limit to the number of times data may be rewritten on a disk without errors. All information is stored in the memory of a controller for

controlling the system for the purpose of limiting the number of times recording is required and rapidly accessing data. However, as described above, in the case of a still picture, if the amount of information is increased, much time is required for reading the information. Also, there is a limit to the amount of information that can be stored in a memory with a limited size. Accordingly, it is not possible to record a large-capacity still picture.

**[0007]** It is an aim of the first embodiment of the present invention to provide a recording medium for efficiently storing a plurality of large-capacity still pictures and preferably for efficiently storing the pictures in a manageable structure. It is a preferred aim to provide a recording medium for arranging video information for a still picture and video and audio information for a still picture having original audio data added thereto in the recording order of recorded bitstreams and storing the same. It is another preferred aim to provide a recording medium for recording and managing additional audio data added to a still picture data.

**[0008]** It is an aim of a second embodiment of the present invention to provide a method for recording and for grouping large-capacity still pictures to manage the same, and reproduction-related information, and reproducing a still picture in accordance with the recorded information. A preferred aim is to provide a method for recording still picture information consisting of video information for a still picture and video and audio information for a still picture having original audio data added thereto, and reproduction-related information, and reproducing a still picture or a still picture having original audio data added thereto. Another preferred aim is to provide a method for recording still picture information, additional audio information for after-recording and reproduction-related information, and reproducing a still picture, a still picture having original audio data added thereto, or a still picture having additional audio data added thereto in accordance with the recorded information.

**[0009]** It is an aim of a third embodiment of the present invention to provide an apparatus for recording still picture information for a plurality of large-capacity still pictures and managing the same. A preferred aim is to provide an apparatus for recording additional audio information for after-recording separately from the still picture information, and reproduction-related information, and preferably for reproducing a still picture, a still picture having original audio data added thereto, or a still picture having additional audio data added thereto in accordance with the recorded information.

**[0010]** According to a first aspect of the present invention, there is provided a recording medium as set forth in claim 1 appended hereto. The recording medium includes a first region having a plurality of still picture data, a second region having a plurality of additional audio data added to the still picture data, and a third region having information indicating the connectivity between

the still picture data in the first region and the additional audio data in the second region.

[0011] Each of the first, second and third regions may exist in the form of a separate file, or the first and third regions may exist in one file.

[0012] Preferably, the information in the third region includes still picture group information for grouping the plurality of still picture data in order to manage the still picture data at a group level, and additional audio group information for grouping the plurality of additional audio data in order to manage the additional audio data at a group level.

[0013] Preferably, the information in the third region further includes still picture general information containing information relating to the number of still picture groups, and additional audio general information containing information relating to the number of additional audio groups.

[0014] Preferably, the still picture group information includes still picture group general information containing the start position of a still picture group and information relating to the number of video parts in the still picture group, and information for the respective still pictures, the information containing position information for the respective still pictures.

[0015] Preferably, the still picture group general information further includes identification information of a still picture group.

[0016] Preferably, the position information for the respective still pictures includes size information of video parts.

[0017] Preferably, the first region further includes original audio data related to the still picture data.

[0018] Preferably, the position information for the respective still pictures further includes size information of audio parts for the original audio data of the still picture data, and playback time information.

[0019] Preferably, the position information for the respective still pictures includes identification information of the still picture data in a still picture group.

[0020] Preferably, the information for the respective still pictures further includes connectivity information indicative of additional audio data.

[0021] Preferably, the connectivity information further includes identification information of an additional audio group indicative of additional audio data and identification information of the additional audio data in the corresponding additional audio group.

[0022] Preferably, the additional audio group information includes additional audio group general information containing the start position of additional audio group data and information relating to the number of kinds of additional audio data in the additional audio group, and information for the respective additional audio parts, the information containing position information for the respective additional audio parts.

[0023] Preferably, the additional audio group general information further includes identification information of

an additional audio group, and the information for the respective additional audio parts further includes identification information of additional audio parts in an additional audio group.

5 [0024] Preferably, the position information for the respective additional audio parts includes size information of additional audio parts and playback time information.

[0025] Preferably, the third region further stores playback information related to reproduction.

10 [0026] Preferably, the playback information includes identification information of a still picture group, and information for playback start and ending positions in the still picture group.

15 [0027] Preferably, the playback information is applied to all or some of the still picture groups.

[0028] According to the first aspect of the present invention there is provided a recordable and/or rewriteable recording medium as set forth in claim 20 appended hereto. The recording medium is suitable for recording a plurality of still picture data, and still picture group information for separating the still pictures into within a predetermined maximum number of groups in order to manage the still pictures at a group level, wherein the still picture group information includes information indicative of additional audio data added to the still picture data, wherein the additional audio data are stored in a separate area (213), and wherein additional audio group information (212) for separating the additional audio data into within a predetermined maximum number of groups in order to manage the additional audio data at a group level is stored.

25 [0029] Preferably, the information indicative of additional audio data contained in the information for the still pictures to which the additional audio data are added, includes identification information of additional audio groups, and identification information of additional audio data in an additional audio group.

[0030] Preferably, the additional audio data are stored in a file different from that for the still picture data.

30 [0031] Preferably, the additional audio parts are stored in a separate area of the same file as that for the still picture data.

[0032] Preferably, the additional audio group information includes general information containing position information of an additional audio group and information relating to the number of additional audio parts, and additional audio maps containing size information of the additional audio parts and playback time information.

35 [0033] Preferably, the general information further includes identification information of an additional audio group and each of the additional audio maps further includes identification information of the additional audio data in an additional audio group.

40 [0034] According to a second aspect of the present invention there is provided a method as set forth in claim 26 appended hereto. The method is for recording and/or reproducing audio and/or video data on a recordable and/or rewriteable recording medium and includes the

steps of (a) recording a plurality of still pictures, (b) separating the plurality of still pictures into within a predetermined maximum number of groups and recording still picture group information and playback information related to reproduction, (c) recording additional audio data added to a desired still picture in a separate area, after the plurality of still pictures are recorded, and (d) recording additional audio group information for separating the additional audio data into within a predetermined maximum number of groups in order to manage the additional audio data at a group level, and information indicative of the additional audio data corresponding to the desired still picture, the information included in the still picture group information.

[0035] The method preferably further includes the steps of (e) reading the still picture group information to be reproduced in accordance with the playback information, (f) calculating the position of a desired still picture in accordance with the read still picture group information and reproducing the still picture data located at the calculated position, and (g) if the information indicative of an additional audio group is present in the read still picture group information, calculating the position of the additional audio data for the corresponding still picture in accordance with the additional audio group information and reproducing the additional audio data.

[0036] According to a third aspect of the present invention there is provided a reproduction method as set forth in claim 44 appended hereto. In the reproduction method for use with a recording medium comprising a first region having data for a plurality of still pictures, a second region having data for a plurality of additional audio data added to the still pictures, and a third region having information indicating the connectivity between the still picture data in the first region and the additional audio data in the second region, the reproduction method includes the step of reproducing the still picture data in the first region and the additional audio data added to the still picture data, based on the connectivity information in the third region.

[0037] According to a fourth aspect of the present invention there is provided an apparatus as set forth in claim 53 appended hereto. The apparatus according to this aspect of the invention includes a recording processor for signal-processing a plurality of still picture data to be recorded on a first region on the recording medium and signal-processing a plurality of additional audio data added to the still picture data to be recorded on a second region, and a controller for generating connectivity information indicative of the connectivity between the still picture data in the first region and the additional audio data in the second region, and playback information related to the reproduction order and controlling the same to be recorded on a third region.

[0038] Also, the apparatus may further include a playback processor for signal-processing the still picture data in the first region and the additional audio data added to the still picture data to be reproduced based on the

information in the third region.

[0039] Other preferred features of the present invention will be apparent from the dependent claims and the detailed description which follows.

[0040] For a better understanding of the invention, and to show how embodiments of the same may be carried into effect, reference will now be made, by way of example, to the accompanying diagrammatic drawings in which:

Figure 1 illustrates a connection structure of various kinds of information and data in a moving picture;

Figure 2 shows an example of an overall information structure according to an embodiment of the present invention;

Figure 3 shows the relationship between various kinds of information and still picture data in a still picture according to an embodiment of the present invention;

Figure 4 is a block diagram of a recording/reproducing apparatus according to an embodiment of the present invention;

Figure 5 shows the relationship between still picture data and still picture group information according to an embodiment of the present invention;

Figure 6 shows the relationship between additional audio data added to still picture data and additional audio group information according to an embodiment of the present information;

Figure 7 shows the relationship between cell information and still picture group information;

Figure 8 shows the relationship among cell information, still picture group information and additional audio group information;

Figure 9 illustrates the structure of still picture group information according to an embodiment of the present invention;

Figure 10 is a table showing an example of the detailed contents of general information for a still picture group shown in Figure 9;

Figure 11 illustrates the structure of a map table for a still picture shown in Figure 9;

Figure 12 is a table showing an example of the detailed contents of a video map in the map table shown in Figure 11;

Figure 13 is a table showing an example of the de-

tailed contents of an original audio map connected to the video map shown in Figure 12;

Figure 14 illustrates the structure of still picture & additional audio group information according to an embodiment of the present invention;

Figure 15 is a table showing an example of the detailed contents of general information for still picture & additional audio data shown in Figure 14;

Figure 16 illustrates the structure of a map table for still picture & additional audio data shown in Figure 14;

Figure 17 is a table showing an example of the detailed contents of the map table for still picture & additional audio data shown in Figure 16;

Figure 18 is a table showing an example of the detailed contents of cell information for the still picture shown in Figures 7 and 8;

Figure 19 is a flow chart showing a method for recording a still picture according to an embodiment of a present invention;

Figure 20 is a flow chart showing a method for recording additional audio data after recording a still picture according to an embodiment of the present invention;

Figure 21 is a flow chart showing a method for reproducing a still picture according to an embodiment of the present invention; and

Figures 22A and 22B are flowcharts showing a method for reproducing a still picture according to another embodiment of the present invention.

**[0041]** Hereinafter, preferred embodiments of recording media for storing the information for a still picture, and recording and/or reproducing method and apparatus therefor, will be described.

**[0042]** Figure 2 shows an example of an overall information structure according to an embodiment of the present invention, in which information comprising PGC information, moving picture information and still picture information can be recorded in an information file or an information area.

**[0043]** Here, PGC general information contains information such as the number of programs in a PGC. Program general information contains information such as the number of cells in a program. The cell information designates a VOB in the case of a moving picture, as shown in Figure 1, and designates a still picture VOB group (to be abbreviated as "still picture group" for brevity) instead of a VOB, in the case of a still picture, as

shown in Figure 3. Since the moving picture information has already been described with reference to Figure 1, a description thereof will not be repeated here and still picture information according to the present invention will now be described. Still picture general information contains information relating to an embodiment of the number of kinds of still picture group information, and additional audio general information for the still picture contains information relating to the number of kinds of additional audio group information.

**[0044]** Figure 3 shows the connection structure of various kinds of information and still picture data in a still picture. In other words, in a still picture recorded in units of VOBs in a data file, a plurality of VOBs for still pictures are managed by a still picture group, and cell information contained in the PGC information 21 designates still picture group information (GVOB), rather than a single VOB information. Also, audio data may be recorded in addition to the still picture. The audio data is recorded consecutively after the still picture is recorded, thereby reducing the search time of a reproducing head during reproduction. The audio data recorded together with the still picture is called original audio data, which is contained in the still picture group. In the present invention, unless specifically defined, a still picture represents both one having only a video part and one having the original audio part and the video part. By managing the still picture by grouping the same in such a manner, the amount of cell information and still picture information can be reduced. For example, video coding attributes or original audio coding attributes in a still picture group are assimilated thus forming still picture group general information, and stored as common information. For the respective still pictures, the positions thereof in the still picture data file must be indicated. In the case when the still pictures are not separated into a plurality of groups, the start positions of the respective still pictures must be indicated. However, in the case when the still pictures are grouped, the start position at which the pertinent still picture group starts to be recorded in a file is stored in the still picture group general information and then only the sizes of the respective still pictures are recorded as the information for the respective still pictures. Since the amount of information indicative of the size of still picture data, i.e., the number of bytes, is generally less than that indicative of the position I

**[0045]** A user may add separate additional audio data to a desired still picture after recording the still picture and original audio data on a still picture file 23. At this time, only the additional audio data are collected and recorded in a separate area in the additional audio data file 24 or the still picture file 23, with the original audio data being retained. The additional audio data are also managed by grouping in the same manner as in the still picture data and the concept thereof is the same as that of the still picture data. In other words, a plurality of additional audio data having the same attributes, e.g., audio coding attributes, are grouped into an additional au-

audio group (to be abbreviated as "GAOB") and then additional audio group general information is recorded as common information. For the respective additional audio data AOBs, only the size information is recorded. The additional audio group general information contains the start positions of audio data in the respective additional audio groups (GAOBs). The connection information for the additional audio data added to the specific still picture, which is indicated by thick arrows in Figure 3, is present in the still picture group information GVOB #1, GVOB #2,... In other words, additional audio group identification information for designating additional audio data existing in the still picture group information and additional audio identification information in the pertinent additional audio group are contained in the still picture group information.

**[0046]** In order to locate a recording position of a specific still picture in the still picture group, the start position of the still picture group data contained in the still picture group general information is added to the size of the data preceding the still picture to be located. Likewise, in order to search the recording position of specific additional audio data, the start position of the additional audio group data contained in the additional audio group general information is added to the size of the data preceding the additional audio data to be located.

**[0047]** In the case of a still picture group, video parts and audio parts are consecutively recorded in a file or space. Thus, the video information and the audio information each containing the size thereof are also recorded in the bitstream order in which the video data and the original audio data are actually recorded. In the case of an additional audio group, there is only the additional audio data. Thus, only the additional audio information is recorded in the bitstream order in which the additional audio data is actually recorded.

**[0048]** Thus, as shown in Figure 3, there is the still picture file 23 to which the original audio data may be added, the additional audio data file 24 added to the still picture and the information file containing the PGC information 21 and the still picture information 22 having the still picture group information (GVOB) and the additional audio group information (GAOB). However, the additional audio data may be recorded in a separate area of the still picture file 23, rather than in the additional audio data file 24. The still picture file 23 can be designated by a first region, the additional audio data file 24 can be designated by a second region, and the information file containing the PGC information 21 and the still picture information 22 can be designated by a third region which is a logic region.

**[0049]** Figure 4 is a block diagram of a recording/reproducing apparatus for implementing an embodiment of the present invention. The function of an apparatus for recording/reproducing A/V (audio/video) data using a recordable and rewriteable disk is largely divided into recording and reproduction.

**[0050]** During recording, an AV codec 110 compres-

sion-codes an externally applied A/V signal by a predetermined compression scheme and supplies size information for compressed data. A digital signal processor (DSP) 120 receives A/V data supplied from the AV codec 110, adds additional data for ECC (error correction code) processing thereto and performs modulation using a predetermined modulation scheme. A radio frequency amplifier (RF AMP) 130 converts electrical data supplied from the DSP 120 into an RF signal. A pickup 140 drives a disk and records the RF signal supplied from the RF AMP 130, incorporating an actuator for focusing and tracking. A servo 150 receives information necessary for servo control from a system controller 160 and stably performs a servo function. The system controller 160 controls the overall system through interfacing with a user to thus control the still picture to be recorded on the disk and record separate information for the recorded still picture. Still picture data are managed at a group level by constructing the still picture group information of the information for the respective still pictures, including size information of still picture data, size information of original audio data, playback time information of original audio data and the like, and the position information of the respective still pictures, in the recording order of recorded still pictures and audio data. When additional audio data is added to a still picture, the added additional audio data is recorded in a different file from or in the same file as that for the still picture but in a different area from that of the still picture. Additional audio data are managed at a group level by constructing additional audio group information of the information for recorded additional audio data, including size information of additional audio data, playback time information of additional audio data and the like, and position information of the respective additional audio groups. The information for the respective still pictures includes information indicative of the added additional audio data. **[0051]** Cell information concerning the reproduction order is recorded as well as the above-described information. The cell information contains information indicative of the recorded still picture group so that the recorded still picture and audio data can be reproduced. **[0052]** During playback, the pickup 140 picks up the optical signal from the disk having data stored therein and the data is extracted from the optical signal. The RF AMP 130 converts the optical signal into an RF signal, and extracts a servo signal for performing a servo function, and modulated data. The DSP 120 demodulates modulated data supplied from the RF AMP 130 corresponding to the modulation scheme used during modulation, performs an ECC process to correct errors and eliminates added data. The servo unit 150 receives information necessary for servo control from the RF AMP 130 and the system controller 160 and stably performs a servo function. The AV codec 110 decodes the compressed A/V data supplied from the DSP 120 to output an A/V signal. The system controller 160 controls the overall system for reproducing the user's desired data



(still picture only, still picture + original audio data or still picture + additional audio data) using the cell information and still picture group information stored on the disk while performing user interfacing such as processing of the user's key inputs.

**[0053]** In other words, in order to reproduce a specific still picture and audio data, the still picture group information having the still picture to be reproduced is obtained from the cell information, information such as the size of the still picture data and the information for the data size and playback time of original audio data, if any, is obtained from the still picture group information, thereby reproducing only desired data. Also, if additional audio data is added to the still picture, desired additional audio data is reproduced using information for the data size or playback time of the additional audio data from the additional audio group information pointed to by the still picture group information.

**[0054]** Also, if virtually deleted still picture information is read from the still picture group information, the corresponding still picture and original audio data are not reproduced so that although the data actually exists, it seems to the user that it does not exist. Likewise, if the added additional audio data is virtually deleted, it is not reproduced.

**[0055]** Here, the A/V codec 110, the DSP 120, the RF AMP 130 and the pickup 140 operating during recording can be referred to as a recording processor. Also, the pickup 140, the RF AMP 130, the DSP 120 and the A/V codec 110 operating during playback can be referred to a reproduction processor.

**[0056]** Figure 5 shows the relationship between still picture data and still picture group information, in which the information for a plurality of still pictures (e.g., 64 maximally) having the same attributes is recorded in the respective still picture group (GVOB) information 201. The number of the still pictures forming each still picture group is determined such that it is within the limit of the maximum number of still pictures. Each still picture group information 202 includes still picture group general information and information for the respective still pictures and is information for still picture data 203 composed of video parts and video or audio parts in a sequence of bitstreams recorded. The still picture group generation information has the start address of the corresponding still picture group.

**[0057]** Also, as information for the respective still pictures, still picture information having original audio data exists in the form of map information composed of video part information for video parts and audio part information for audio parts. Here, a video map and an audio map for a still picture have the same identification information. If the still picture information is composed of only video parts, it exists in the form of a map having only the video part information. In the still picture group information 202, virtual deletion information for virtually deleting both a still picture and original audio data added thereto is present. Here, still picture data is recorded in a VOB.

**[0058]** Figure 6 shows the relationship between additional audio data added to a still picture and additional audio group invention according to an embodiment of the present information, in which additional audio group (GAOB) information 211 includes information for additional audio data recorded in units of a plurality of still picture groups. Additional audio group information 212 has additional audio group general information containing the start address of the corresponding additional audio group and audio maps (AMAPs) following the sequence of additional audio data. The information for additional audio data 213 composed of additional audio parts of a still picture is recorded in each additional audio map, inclusive of size information of additional audio data. Also, the additional audio group information 212 includes virtual deletion information for virtually deleting the respective second audio parts.

**[0059]** Figure 7 shows the relationship between cell information (which can also be referred to as playback information) and still picture group information, in which a cell is a logical unit in relation to indication of a reproduction order. The cell information includes still picture group identification information (GVOB\_ID), still picture reproduction start identification information (START VOB\_ID) of the corresponding still picture group and still picture reproduction ending identification information (END VOB\_ID). The cell information may correspond to all the still picture groups or may correspond to some of still picture groups which are intended to be reproduced.

**[0060]** The additional audio data is stored in a separate area from the still picture data, that is, in a different file or in a different area of the same file from or as that of the still picture data.

**[0061]** For example, in the case when the additional audio data is stored in a separate file from the still picture data, as shown in Figure 7, GVOB #1, #2 and #3 having still picture data constitute a file. Also, as shown in Figure 8, GAOB #1, #2 and #3 having additional audio data constitute a file. Thus, in the case of recording/reproducing actual still picture or additional audio data, the still picture or additional audio data is accessed using the information of each file.

**[0062]** Alternatively, in the case when the additional audio data and the still picture data are stored in one and the same file, GVOB #1, #2 and #3 and GAOB #1, #2 and #3 shown in Figures 5 and 6 constitute a file. In constituting the file in such a manner, the respective GVOBs and GAOBs may be mixed in the recording order, for example, in the order of GVOB #1, GVOB #2, GAOB #1, GVOB #3, GAOB #2 and GAOB #3. Otherwise, the GVOBs and GAOBs are coupled and arranged in each batch to constitute a file.

**[0063]** Figure 8 shows the relationship among cell information, still picture group information and additional audio group information, for designating desired additional audio data in the additional audio group recorded in a separate area as well as original audio data as the audio data added to a still picture. The cell information

includes still picture group identification information (GVOB\_ID), still picture reproduction start identification information (START VOB\_ID) in the corresponding still picture group and still picture reproduction ending identification information (END VOB\_ID). Video part information in the information for still picture group GVOB #1 may have information for designating additional audio data added to a still picture, that is, additional audio group identification information and additional audio identification information in the corresponding additional audio group. For example, additional audio group identification information GAOB #j and identification information #2 indicating that the additional audio data is the second audio map in the GAOB #j exist in the video part information for a still picture #2 of the still picture group GVOB #i.

**[0064]** Figure 9 illustrates the structure of still picture group information according to the present invention, which includes still picture group general information and a still picture map table, and may further include attribute information for a still picture such as picture sizes or video encoding modes.

**[0065]** Figure 10 is a table showing an example of the detailed contents of still picture group general information shown in Figure 9, which includes GVOB\_ID representing information for identifying a still picture group in a still picture file, GVOB\_S\_ADR representing the start address of first still picture data in the corresponding still picture group in the still picture file, GVOB\_Ns representing the number of still pictures in the still picture group, GVOB\_Ds representing the number of virtually deleted still pictures in the corresponding VOB group, and so on. If GVOB\_Ds and GVOB\_Ns are equal to each other, the VOB group can be deleted from a file. If GVOB\_Ds is not stored expressly, it is checked whether all still pictures in the corresponding still picture group are in a virtually deleted state to then be actually deletable. Also, the identification information GVOB\_ID can be expressly recorded as a unique one for each still picture group in a still picture file or can be suggestively indicated in the order of still picture groups, that is, #1, #2,...

**[0066]** Figure 11 illustrates the structure of the still picture map table shown in Figure 15. There are two types of maps; one is video maps VMAPs for video parts and the other is audio maps AMAPs for original audio parts added to a still picture. The order of maps is the same as that of data of recorded bitstreams in a still picture file as shown in Figure 5. Thus, in the case when a still picture has only video parts, there are only video maps. In the case when a still picture has original audio data in addition to the video parts, both video maps and audio maps are recorded and are practically considered as one map using the same identification information.

**[0067]** Figure 12 is a table showing an example of the detailed contents of a video map in the map table shown in Figure 11, containing MAP\_TY indicating the type of a corresponding map and represented by a binary "0" in the case of a video map for video parts, VOB\_ID in-

dicating identification information for the video parts and ranging from 1 to 64 in preferred embodiments. Also, VOB\_ID can be expressly indicated or suggestively indicated in the recording order, that is, #1, #2, #3,...

**[0068]** Also, the video map contains V\_DELETE which is a binary value indicating deletion or non-deletion of a VOB, that is, indicating that a VOB is not deleted if the value thereof is "0" and that the VOB is virtually deleted if the value thereof is "1", V\_PART\_SZ indicating the size of a video part, GAOB\_ID which is identification information of an additional audio group, the value of which exists if a still picture has additional audio data, and the value of which is "0" if a still picture does not have additional audio data, and AOB\_ID which is identification information of additional audio data in an additional audio group if a still picture has additional audio data, and the value of which is "0" if a still picture does not have additional audio data.

**[0069]** Here, VOB\_ID and V\_PART\_SZ can be referred to as still picture position information, and GAOB\_ID and AOB\_ID can be referred to as additional audio connectivity information.

**[0070]** Figure 13 is a table showing an example of the detailed contents of an original audio map, containing MAP\_TY indicating the type of a corresponding map and represented by a binary value "1" in the case of an audio map for audio parts, A\_PBTM indicating the playback time of an audio part and A\_PART\_SZ indicating the size of an audio part.

**[0071]** Figure 14 illustrates the structure of additional audio group information for a still picture according to the present invention, containing additional audio general information and an additional audio map table for the still picture. Also, additional audio attribute information for the still picture may be further included.

**[0072]** Figure 15 is a table showing an example of the detailed contents of additional audio general information for a still picture, shown in Figure 14, containing GAOB\_ID indicating identification information for an additional audio group in an additional audio file, GAOB\_S\_ADR indicating the start address of the first additional audio data in the corresponding additional audio group in the additional audio file, and GAOB\_Ns indicating the number of additional audio parts contained in the additional audio groups. GAOB\_ID can be expressly indicated or suggestively indicated in the recording order.

**[0073]** Figure 16 illustrates the structure of an additional audio map table consisting of n additional audio maps for additional audio parts shown in Figure 15.

**[0074]** Figure 17 is a table showing an example of the detailed contents of the additional audio map table for the still picture shown in Figure 16, containing AOB\_ID indicating identification information for a specific audio part in an additional audio group and ranging from 1 to 64 in preferred embodiments, A\_PBTM indicating the playback time of additional audio data and A\_PART\_SZ indicating the size of additional audio data such as the

number of sectors. Here, AOB\_ID can be expressly indicated or suggestively indicated in the recording order, that is, #1, #2, #3,...

**[0075]** Figure 18 is a table showing an example of the detailed contents of cell information for a still picture, shown in Figures 7 and 8, containing S\_GVOB\_ID indicating identification information for a still picture group, S\_VOB\_ID indicating identification information for a still picture in which reproduction starts, and E\_VOB\_ID indicating identification information for a still picture in which reproduction ends.

**[0076]** Figures 19A and 19B illustrate a flow chart showing a method for recording a still picture according to an embodiment of the present invention, that is, a method for recording a still picture and original audio data. First, it is determined whether a still picture or both a still picture and original audio data is recorded (step S101). Still picture group information is generated, identification for a still picture group is allocated, the number of still pictures in the still picture group is set to "0" and the start address of the still picture group in a still picture file is recorded (step S102). It is then determined whether a recording start signal of a still picture is input by a user or not (step S103). If the recording start signal is input, the still picture is recorded in the still picture file, identification information for the still picture is allocated to the still picture group information, the number of still pictures in the still picture group is increased by one and the size information of the still pictures is recorded in the video map (step S104).

**[0077]** It is determined whether or not a mode set by a user is for recording both a still picture and original audio data (step S105). If yes, the audio data for the still picture is recorded following after the corresponding still picture on the still picture file and the audio size information is recorded in an audio map in the still picture group information (step S106).

**[0078]** It is determined whether the number of still pictures recorded is enough to constitute the information for a still picture group (e.g., 64 maximally) (step S107). If the still picture group information is completed, the procedure returns to step S102 to generate another still picture group information. Otherwise, the procedure proceeds to step S103 to determine whether a recording start signal of a still picture is input by a user or not.

**[0079]** If the mode set by a user is for recording only a still picture in step S105, step S106 is skipped and the procedure proceeds to step 107 to record the next still picture. If the recording start signal of a still picture is not input by a user in step S103, it is determined whether or not recording to terminate recording (step S108). If it is determined to terminate recording, cell information is recorded and the procedure ends (step S109). Here, the cell information is created for every still picture group so as for all still pictures to be reproduced.

**[0080]** Figure 20 is a flow chart showing a method for recording additional audio data after recording a still picture according to an embodiment of the present inven-

tion. First, additional audio group information is generated, identification information for an additional audio group is allocated, the number of additional audio parts in the additional audio group is set to "0" and the start address of the audio group is recorded in an additional audio file (step S201).

**[0081]** It is then determined whether the recording start signal of additional audio data is input by a user or not (step S202). If the recording start signal is input, a specific still picture to which the user desires to add additional audio data is designated (step S203). The additional audio data is recorded in an additional audio file, identification information for additional audio data in the audio map of the additional audio group information is allocated, the number of additional audio parts in the additional audio group is increased by one, and the size information of the additional audio data in the audio map is recorded (step S204). Although it has been described herein that the additional audio data is recorded in a different file from that of the still picture, the additional audio data can be recorded in a separate area of the same file as that of the still picture.

**[0082]** Identification information for the still picture group of a predetermined still picture and identification information for the still picture are read and the information for the still picture, that is, identification information for an additional audio group for additional audio parts and identification information for additional audio data, are recorded in the video map for the predetermined still picture (step S205).

**[0083]** It is then determined whether the number of additional audio parts in an additional audio group reaches N, that is, enough to constitute a group (step S206). If yes, the procedure goes to step S201 to generate another additional audio group information. Otherwise, it is determined whether the recording start signal of additional audio data is input by a user (step S202). If a recording start signal of additional audio data is not input by a user in step 202, the procedure is terminated.

**[0084]** Here, the step of designating a specific still picture (step S203) may precede the step of determining whether or not a recording start signal of additional audio data is input by a user (step S202).

**[0085]** Figure 21 is a flow chart showing a method for reproducing a still picture according to an embodiment of the present invention, that is, a method for reproducing a still picture and original audio data added thereto. Referring to Figure 21, PGC information and cell information are read (step S301). Identification information for a still picture group to be reproduced, playback start identification information and playback ending identification information are read from the cell information to read the still picture group information pointed to by the cell (step S302). Video map information for the video part corresponding to the playback start identification information in the read still picture group information is obtained to read the size of a video part, or both video

map information and audio map information are obtained in the case of a still picture having original audio data to read the size of a video part and the size of an audio part (step S303).

**[0086]** The position of a desired still picture is calculated by the read video part information and video data located at the calculated position is read and decoded to reproduce the still picture (step S304). Here, the position of a desired still picture is obtained by summing the start position of a still picture group and the size of data preceding the desired still picture. While the still picture is reproduced, it is determined whether original audio data is added to the still picture (step S305). If yes, the original audio data is read and decoded to reproduce the original audio data (step S306). Here, the reading position of the original audio data is obtained by summing the calculated position of the still picture and the size of video parts of the still picture. It is checked whether all still pictures belonging to a cell are reproduced or not using the cell information and then it is determined whether or not there is a still picture to be reproduced next (step S307). If yes, the information for the video part of a still picture to be reproduced next is read (step S303). Otherwise, the procedure is terminated. In the case when there are a plurality of series of cell information, this routine is repeated.

**[0087]** Here, the step of determining whether original audio data is added to a still picture (step S305) may be performed directly after the step of reading the still picture group information (step S302). This is because it is possible to determine that original audio data is added to a still picture in the case when an audio map for audio parts is added subsequently to a video map for video parts, in accordance with the still picture group information.

**[0088]** Figures 22A and 22B illustrate a flowchart showing a method for reproducing a still picture according to another embodiment of the present invention, that is, a method for reproducing a still picture, a still picture having original audio data, or a still picture having additional audio data. Referring to Figure 22A, cell information is read from PGC information (step S401) and then still picture group information pointed to by a cell to be reproduced is read (step 402). Information for the start position of a still picture group is read from the read still picture group information and the position of a desired still picture is calculated (step S403). Here, the position of a desired still picture is obtained by summing the start position of a still picture group and the size of data preceding the desired still picture. The video data is read and decoded in accordance with the position information of the desired still picture to reproduce the still picture (step S404).

**[0089]** It is then checked whether additional audio data is present in the still picture group information or not (step S405). If not, it is checked whether there is original audio data (step S406). Here, the presence of additional audio data in the map information for video parts of the

desired still picture to be reproduced can be determined using the identification information for an additional audio group and the identification information for additional audio data. The presence of original audio data can be known by determining whether there is audio information (an audio map) in the map table of the desired still picture to be reproduced.

**[0090]** If there is original audio data in step S406, the read position of the original audio data is calculated (step S407). Here, the read position of the original audio data is obtained by summing the calculated position of the still picture and the size of video parts of the still picture. Original audio data is read from the calculated position information of the still picture and decoded to reproduce the original audio data (step S408) and the procedure proceeds to step S411 as shown in Figure 22B.

**[0091]** If additional audio data is present in step S405, that is, if the read identification information for the additional audio group designated to the still picture and identification information for the additional audio data are not "0", the start position of the additional audio group is read from the additional audio group information to calculate the position of desired additional audio data (step S409 in Figure 22B). The position of desired additional audio data is obtained by summing the start position of an additional audio group and the size of the additional audio data preceding the additional audio data having the identification information for desired additional audio data in the additional audio group.

**[0092]** Additional audio data is read from the calculated position information for the desired additional audio data and is decoded to reproduce the additional audio data (step S410). Then, it is determined whether there is a still picture to be reproduced next (step S411). If yes, the procedure returns to step S403. Otherwise, the procedure is terminated (step S411). In the case of reproducing a plurality of cells, the overall procedure is repeated.

**[0093]** Alternatively, instead of step 405 of determining whether additional audio data is present or not and step 406 of determining whether original audio data is present or not, it is first determined using the still picture group information read in step S402 whether the still picture to be reproduced is a still picture having only a video part, one having original audio data added thereto, or one having additional audio data added thereto. If the still picture has only a video part, steps S403 and S404 are performed. If the still picture has original audio data, steps S403, S404, S407 and S408. If the still picture has additional audio data, steps S403, S404, S409, S410 and S411.

**[0094]** Further, according to another aspect of the present invention, before reproduction, a reproduction mode is set by interfacing with a user to determine whether only a still picture is to be reproduced, both a still picture and original audio data are to be reproduced, or both a still picture and additional audio data are to be reproduced.

**[0095]** As described above, large-capacity still pictures, original audio parts added thereto and additional audio data can be recorded using minimum information. During reproduction, data can be displayed and edited in units of still pictures. Also, it is possible to cope with after-recording of the audio data using the additional audio data.

**[0096]** Also, video maps and/or audio maps for still pictures can be formed in a recording order of bit-streams, thereby allowing effective management of information.

**[0097]** The reader's attention is directed to all papers and documents which are filed concurrently with or previous to this specification in connection with this application and which are open to public inspection with this specification, and the contents of all such papers and documents are incorporated herein by reference.

**[0098]** All of the features disclosed in this specification (including any accompanying claims, abstract and drawings), and/or all of the steps of any method or process so disclosed, may be combined in any combination, except combinations where at least some of such features and/or steps are mutually exclusive.

**[0099]** Each feature disclosed in this specification (including any accompanying claims, abstract and drawings), may be replaced by alternative features serving the same, equivalent or similar purpose, unless expressly stated otherwise. Thus, unless expressly stated otherwise, each feature disclosed is one example only of a generic series of equivalent or similar features.

**[0100]** The invention is not restricted to the details of the foregoing embodiment(s). The invention extend to any novel one, or any novel combination, of the features disclosed in this specification (including any accompanying claims, abstract and drawings), or to any novel one, or any novel combination, of the steps of any method or process so disclosed.

## Claims

### 1. A recording medium comprising:

a first region (203) having a plurality of still picture data;

a second region (213) having a plurality of additional audio data added to the still picture data; and

a third region (212) having information indicating the connectivity between the still picture data in the first region and the additional audio data in the second region.

### 2. The recording medium according to claim 1, wherein each of the first (203), second (213) and third (212) regions exists in the form of a separate file.

3. The recording medium according to claim 1 or 2, wherein the first (203) and third (213) regions exist in one file.

4. The recording medium according to any of claims 1 to 3, wherein the information in the third region (202,212) includes still picture group information (202) for grouping the plurality of still picture data in order to manage the still picture data at a group level, and additional audio group information (212) for grouping the plurality of additional audio data in order to manage the additional audio data at a group level.

5. The recording medium according to any of claims 1 to 4, wherein the information in the third region (202,212) further includes still picture general information containing information relating to the number of still picture groups, and additional audio general information containing information relating to the number of additional audio groups.

6. The recording medium according to claim 4, wherein the still picture group information includes still picture group general information containing the start position of a still picture group and information relating to the number of video parts in the still picture group, and information for the respective still pictures, the information containing position information for the respective still pictures.

7. The recording medium according to claim 6, wherein the still picture group general information further includes identification information of a still picture group.

8. The recording medium according to claim 6 or 7, wherein the position information for the respective still pictures includes size information of video parts.

9. The recording medium according to claim 8, wherein the first region (203) further includes original audio data related to the still picture data.

10. The recording medium according to claim 9, wherein the position information for the respective still pictures further includes size information of audio parts for the original audio data of the still picture data, and playback time information.

11. The recording medium according to claim 10, wherein the position information for the respective still pictures includes identification information of the still picture data in a still picture group.

12. The recording medium according to any of claims 6 to 11, wherein the information for the respective still pictures further includes connectivity information in-

dicative of additional audio data.

13. The recording medium according to claim 12, wherein the connectivity information further includes identification information of an additional audio group indicative of additional audio data and identification information of the additional audio data in the corresponding additional audio group. 5
14. The recording medium according to any of claims 4 to 13, wherein the additional audio group information includes additional audio group general information containing the start position of additional audio group data and information relating to the number of kinds of additional audio data in the additional audio group, and information for the respective additional audio parts, the information containing position information for the respective additional audio parts. 10 15
15. The recording medium according to claim 14, wherein the additional audio group general information further includes identification information of an additional audio group, and the information for the respective additional audio parts further includes identification information of additional audio parts in an additional audio group. 20 25
16. The recording medium according to claim 14 or 15, wherein the position information for the respective additional audio parts includes size information of additional audio parts and playback time information. 30
17. The recording medium according to any of claims 4 to 16, wherein the third region (202,212) further stores playback information related to reproduction. 35
18. The recording medium according to claim 17, wherein the playback information includes identification information of a still picture group, and information for playback start and ending positions in the still picture group. 40
19. The recording medium according to claim 17 or 18, wherein the playback information is applied to all or some of the still picture groups. 45
20. A recordable and/or rewriteable recording medium for recording a plurality of still picture data (203), and still picture group information (202) for separating the still pictures into within a predetermined maximum number of groups in order to manage the still pictures at a group level, wherein the still picture group information includes information indicative of additional audio data added to the still picture data, wherein the additional audio data are stored in a separate area (213), and wherein additional audio 50 55

group information (212) for separating the additional audio data into within a predetermined maximum number of groups in order to manage the additional audio data at a group level is stored.

21. The recording medium according to claim 20, wherein the information indicative of additional audio data contained in the information for the still pictures to which the additional audio data are added, includes identification information of additional audio groups, and identification information of additional audio data in an additional audio group.
22. The recording medium according to claim 20 or 21, wherein the additional audio data are stored in a file different from that for the still picture data.
23. The recording medium according to claim 20, 21 or 22, wherein the additional audio parts are stored in a separate area of the same file as that for the still picture data.
24. The recording medium according to any of claims 20 to 23, wherein the additional audio group information includes general information containing position information of an additional audio group and information relating to the number of additional audio parts, and additional audio maps containing size information of the additional audio parts and playback time information.
25. The recording medium according to claim 24, wherein the general information further includes identification information of an additional audio group and each of the additional audio maps further includes identification information of the additional audio data in an additional audio group.
26. A method for recording and/or reproducing audio and/or video data on a recordable and/or rewriteable recording medium comprising:
  - (a) recording a plurality of still pictures (203);
  - (b) separating the plurality of still pictures into a predetermined maximum number of groups and recording still picture group information (202) and playback information related to reproduction;
  - (c) recording additional audio data (213) added to a desired still picture in a separate area, after the plurality of still pictures are recorded; and
  - (d) recording additional audio group information (212) for separating the additional audio data into within a predetermined maximum number of groups in order to manage the addi-

tional audio data at a group level, and information indicative of the additional audio data corresponding to the desired still picture, the information included in the still picture group information.

27. The method according to claim 26, wherein the still picture group information includes still picture group general information containing start position information for a still picture group and information relating to the number of video parts in the still picture group, and information for the respective still pictures, the information containing position information for the respective still pictures and information indicative of additional audio data.
28. The method according to claim 27, wherein the position information for the respective still pictures includes size information for video parts.
29. The method according to claim 28, wherein the position information for the respective still pictures further includes size information for audio parts for the additional audio data added to the still picture data and playback time information.
30. The method according to any of claims 26 to 29, wherein the information indicative of additional audio data includes identification information of an additional audio group, and identification information of the additional audio data in the additional audio group.
31. The method according to any of claims 26 to 30, wherein in step (a), original audio data corresponding to the input still picture data is further recorded consecutively after the still picture data.
32. The method according to claim 31, wherein the still picture group information includes still picture group general information containing start position information for still picture group data and information relating to the number of video parts in the still picture group, and information for the respective still pictures, the information containing size information of still picture data, size information of original audio data, playback time information and information indicative of additional audio data.
33. The method according to any of claims 26 to 32, wherein the additional audio group information includes additional audio group general information containing start position information of additional audio group data and information relating to the number of kinds of additional audio data in the additional audio group, and information for the respective additional audio data, the information containing position information for the respective additional

audio data.

34. The method according to any of claims 26 to 33, wherein the additional audio data is stored in a file different from that for the still picture data.
35. The method according to any of claims 26 to 33, wherein the additional audio data is stored in a separate area of the same file as that for the still picture data.
36. The method according to any of claims 26 to 35, further comprising the steps of:
- (e) reading the still picture group information to be reproduced in accordance with the playback information;
  - (f) calculating the position of a desired still picture in accordance with the read still picture group information and reproducing the still picture data located at the calculated position; and
  - (g) if the information indicative of an additional audio group is present in the read still picture group information, calculating the position of the additional audio data for the corresponding still picture in accordance with the additional audio group information and reproducing the additional audio data.
37. The method according to claim 36, wherein the position of the desired still picture is obtained by summing the start position of a still picture group in the read still picture group information and the sizes of data preceding the desired still picture, and the position of the additional audio data is obtained by summing the start position of an additional audio group in the additional audio group information and the size of data preceding the additional audio data.
38. The method according to any of claims 31 to 35, further comprising the steps of:
- (e) reading the still picture group information to be reproduced in accordance with the playback information;
  - (f) calculating the position of a desired still picture in accordance with the read still picture group information and reproducing the still picture data located at the calculated position; and
  - (g) calculating the position of original audio data for the corresponding still picture in accordance with the read still picture group information and reproducing the original audio data.

39. The method according to claim 38, wherein the position of the desired still picture is obtained by summing the start position of a still picture group in the read still picture group information and the sizes of data preceding the desired still picture, and the position of the original audio data is obtained by summing the calculated position of the still picture and the sizes of video parts of the still picture being at the calculated position.
40. The method according to any of claims 26 to 39, further comprising the steps of:
- (k) reading the playback information and reading the still picture group information to be reproduced;
  - (l) checking the read still picture group information and determining whether the still picture has only video parts, the still picture has original audio data added thereto or the still picture has additional audio data thereto;
  - (m) if the still picture has only video parts, calculating the position of a desired still picture and reproducing the still picture data located at the calculated position;
  - (n) if the still picture has additional audio data added thereto, calculating the positions of a desired still picture and the additional audio data and reproducing the still picture data and additional audio data located at the calculated positions; and
  - (o) if the still picture has original audio data added thereto, calculating the positions of a desired still picture and the original audio data and reproducing the still picture data and original audio data located at the calculated positions.
41. The method according to claim 40, wherein the position of a desired still picture is obtained by summing the start position of a still picture group in the read still picture group information and the sizes of data preceding the desired still picture, the position of the original audio data is obtained by summing the calculated position of the still picture and the sizes of video parts of the desired still picture, and the position of the additional audio data is obtained by summing the start position of an additional audio group in the audio group information and the sizes of data preceding the additional audio data.
42. The method according to any of claims 26 to 41, further comprising the steps of:
- (p) reading the playback information and reading the still picture group information to be reproduced; and
  - (q) reproducing only the still picture or reproducing both the still picture and the original audio data using the still picture group information read according to a user's request, or reproducing both the still picture and the additional audio data using the read still picture group information and the additional audio group information.
43. The method according to claim 42, wherein the step (q) comprises the steps of reproducing the desired still picture obtained by summing the start position of a still picture group in the read still picture group information and the size of data preceding the desired still picture, reproducing the original audio data obtained by summing the calculated position of the still picture and the sizes of video parts of the still picture, and reproducing the additional audio data obtained by summing the start position of the audio group in the audio group information and the sizes of data preceding the additional audio data.
44. A reproduction method for use with a recording medium comprising a first region (203) having data for a plurality of still pictures, a second region (213) having data for a plurality of additional audio data added to the still pictures, and a third region (202,212) having information indicating the connectivity between the still picture data in the first region and the additional audio data in the second region, the reproduction method comprising the step of reproducing the still picture data in the first region (203) and the additional audio data in the second region (213) added to the still picture data, based on the connectivity information in the third region (202,212).
45. The reproduction method according to claim 44, wherein the information in the third region (213) includes still picture group information for grouping the plurality of still pictures to manage the same, and additional audio group information for grouping the plurality of additional audio data to manage the same.
46. The reproduction method according to claim 45, wherein the still picture group information includes still picture group general information containing start position information of the still picture group data and the information relating to the number of video parts in the still picture group, and information for the respective still pictures, the information containing position information of the respective still pictures and connectivity information indicative of additional audio data.



47. The reproduction method according to claim 46, wherein the position information for the respective still pictures includes size information of video parts.
48. The reproduction method according to claim 47, wherein the position information for the respective still pictures further include size information of audio parts for the additional audio data added to the still picture and playback time information.
49. The reproduction method according to any of claims 46 to 48, wherein the connectivity information indicative of additional audio data further includes identification information of an additional audio group and identification information of the additional audio data in the additional audio group.
50. The reproduction method according to any of claims 44 to 49, wherein the first region (203) further includes original audio data related to still picture data.
51. The reproduction method according to claim 50, wherein the still picture group information includes still picture group general information containing start position information of a still picture group and the information relating to the number of video parts in the still picture group, and information for the respective still pictures, the information containing size information of still picture data, size information of original audio data, playback time information and information indicative of additional audio data.
52. The reproduction method according to claim 50, wherein the still picture data in the first region and the original audio data for the still picture data are reproduced based on the information in the third region.
53. An apparatus for recording and/or reproducing audio and/or video data on a recordable and/or rewriteable recording medium comprising:
- a recording processor (110,120,130,140) for signal-processing a plurality of still picture data to be recorded on a first region (203) on the recording medium and signal-processing a plurality of additional audio data added to the still picture data to be recorded on a second region (213); and
  - a controller (160) for generating connectivity information indicative of the connectivity between the still picture data in the first region and the additional audio data in the second region, and playback information related to the reproduction order and controlling the same to be recorded on a third region (202,212).
54. The apparatus according to claim 53, wherein each of the first (203), second (213) and third (212) regions exists in forms of a separate file.
55. The apparatus according to claim 53, wherein the first (203) and second (213) regions exist in one file.
56. The apparatus according to any of claims 53 to 55, wherein the recording processor (110,140) further records the original audio data added to input still picture data consecutively after the still picture data.
57. The apparatus according to any of claims 53 to 56, wherein the information in the third region (213) includes still picture group information for grouping the plurality of still picture data to manage the same, and additional audio group information for grouping the plurality of additional audio data to manage the same.
58. The apparatus according to claim 57, wherein the still picture group information includes still picture group general information containing the start position of the data of a still picture group and the information relating to the number of video parts in the still picture group, and information for the respective still pictures, the information containing position information of the respective still pictures and the connectivity information indicative of the additional audio data.
59. The apparatus according to claim 58, wherein the position information of the respective still pictures include size information of video parts.
60. The apparatus according to claim 59, wherein the position information of the respective still pictures include size information of audio parts for the additional audio data added to the still picture data.
61. The apparatus according to any of claims 57 to 60, wherein the additional audio group information includes additional audio group general information containing the start position of data of an additional audio group and the information relating to the number of kinds of additional audio data in the additional audio group, and information for the respective additional audio data, the information containing position information for the respective additional audio data.
62. The apparatus according to any of claims 53 to 61, wherein the playback information includes identification information indicative of a still picture group and information of playback start and pending positions in the still object group.
63. The apparatus according to any of claims 53 to 62,

further comprising a playback processor for signal-processing the still picture data in the first region and the additional audio data added to the still picture data to be reproduced based on the information in the third region.

5

64. The apparatus according to claim 63, wherein the playback processor reproduces a desired still picture being at a position obtained by summing the start position of a still picture group in the still picture group information in the third region and the sizes of data preceding the desired still picture, and additional audio data being at a position obtained by summing the start position of an additional audio group in the additional audio group information and the sizes of data preceding the additional audio data.

10

15

65. The apparatus according to claim 63 or 64, wherein the playback processor reproduces the still picture data and the original audio data based on the information in the third region.

20

66. The apparatus according to claim 65, wherein the playback processor reproduces the data of a desired still picture being at a position obtained by summing the start position of a still picture group in the still picture group information in the third region and the sizes of data preceding the desired still picture, and original audio data being at a position obtained by summing the calculated position of the desired still picture and the sizes of video parts of the desired still picture.

25

30

35

40

45

50

55

FIG. 1

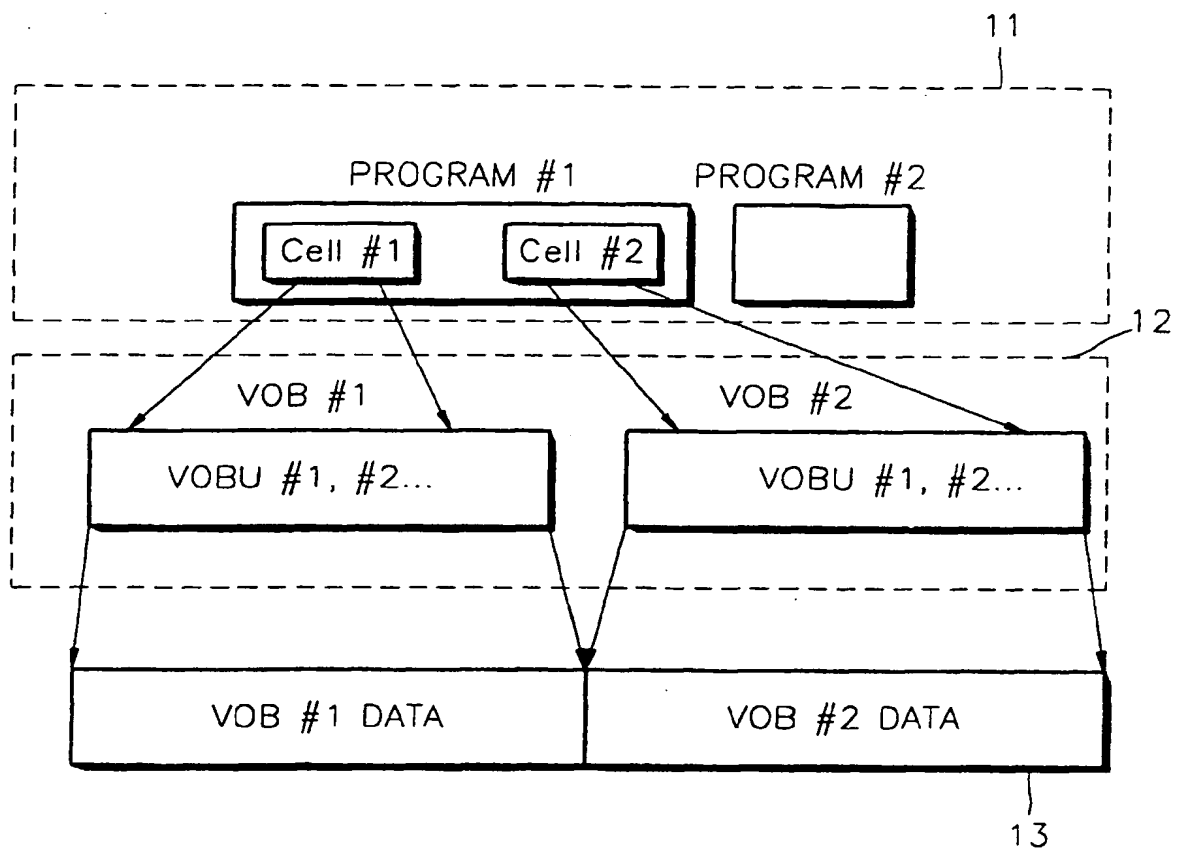


FIG. 2

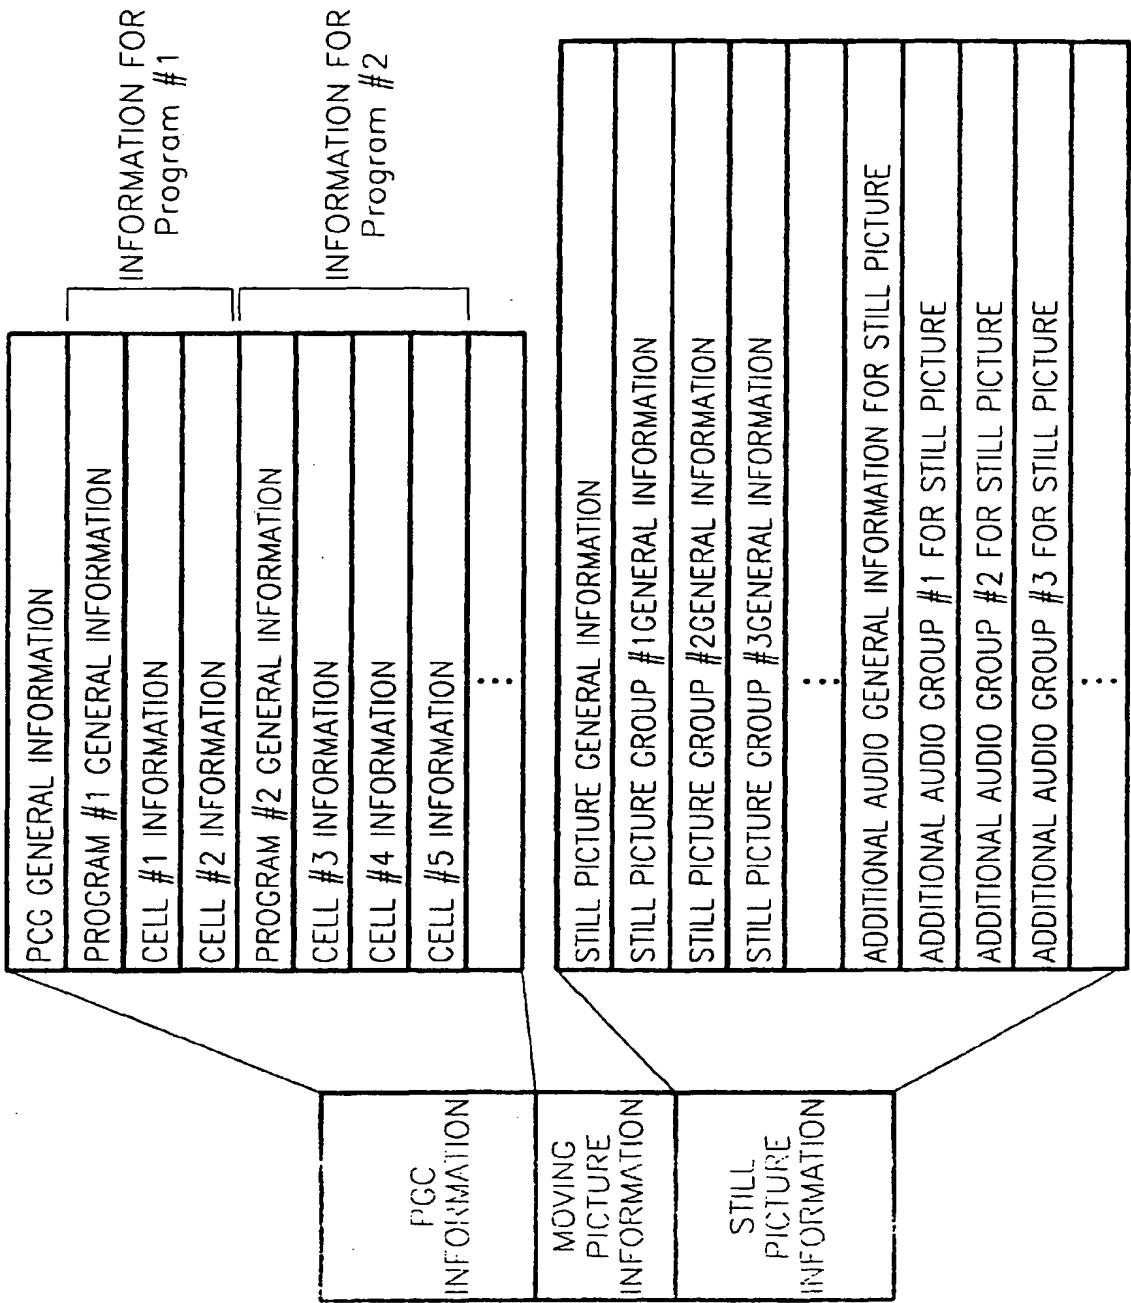


FIG. 3

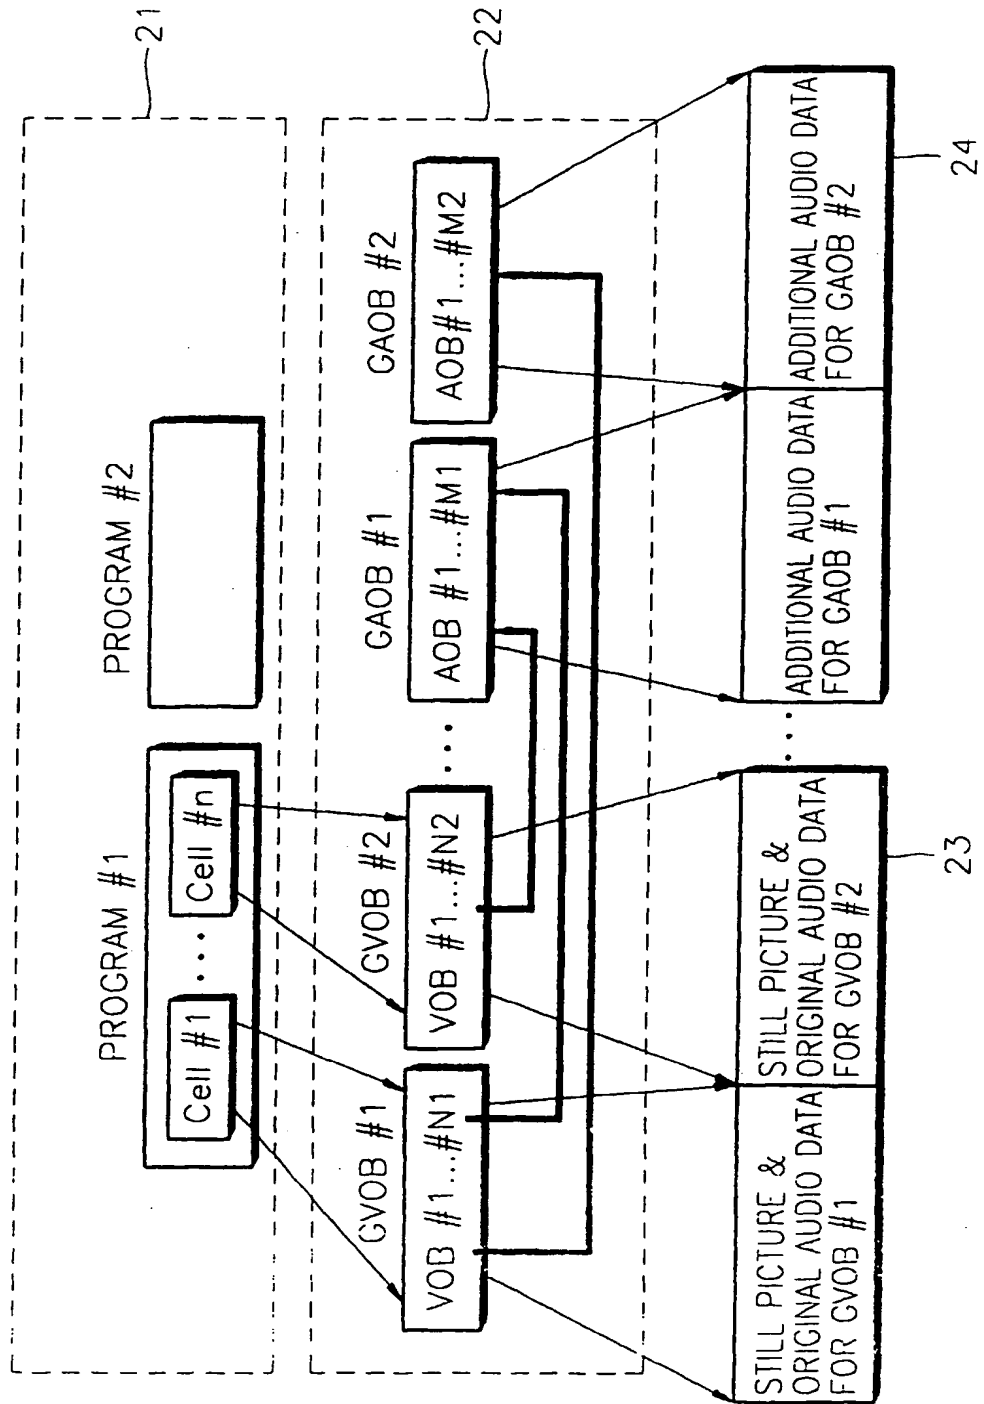


FIG. 4

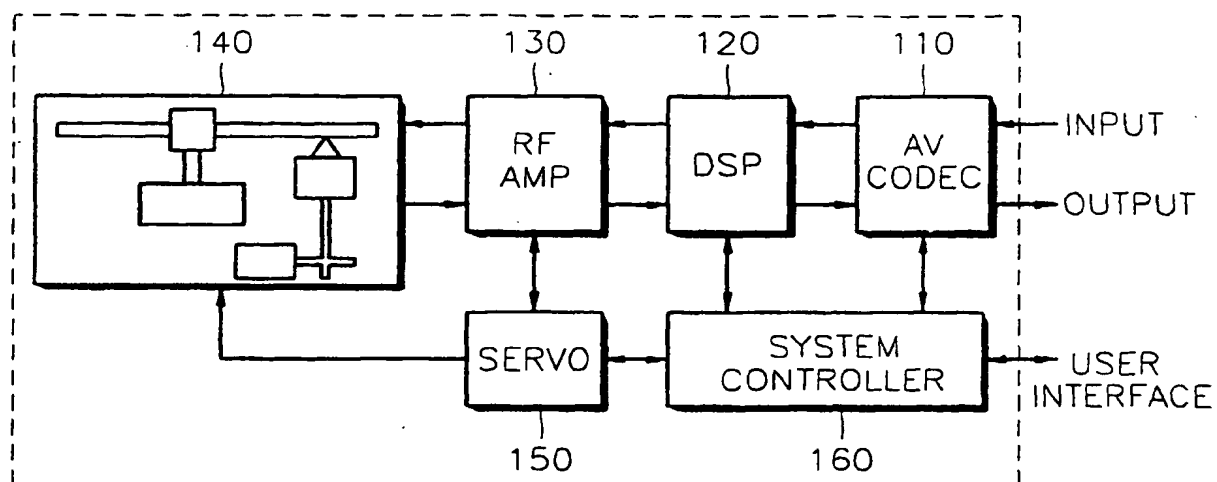


FIG. 5

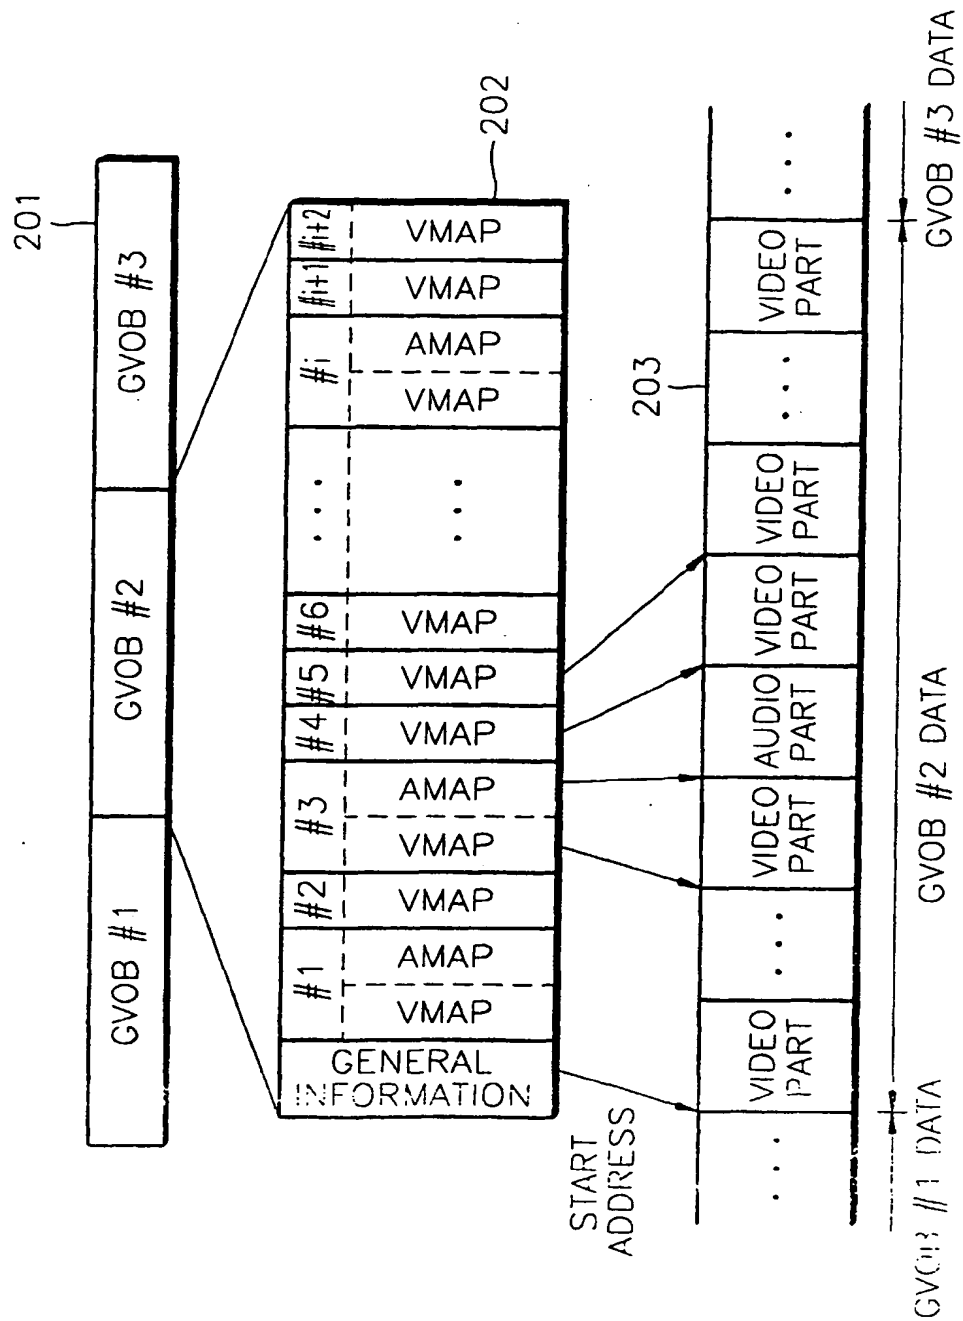


FIG. 6

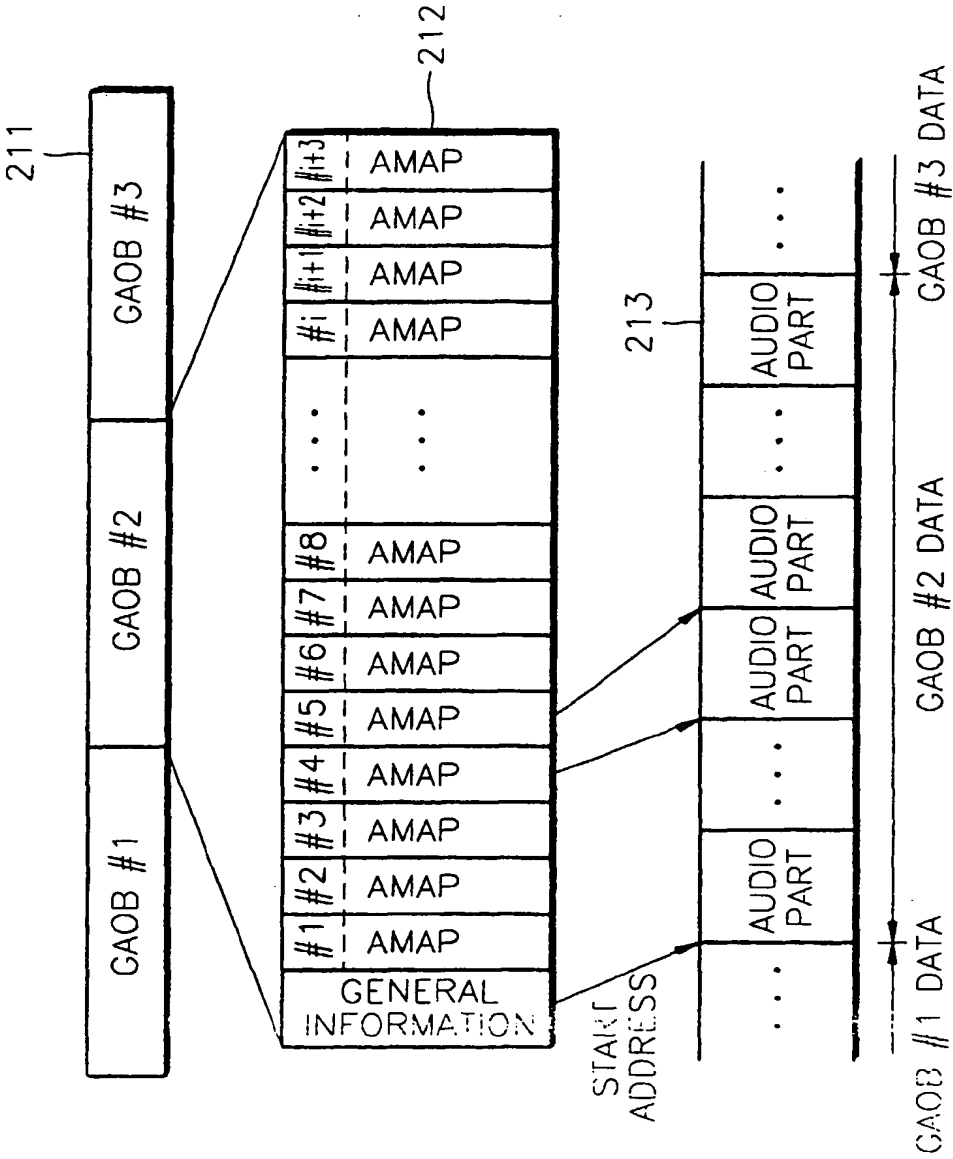




FIG. 7

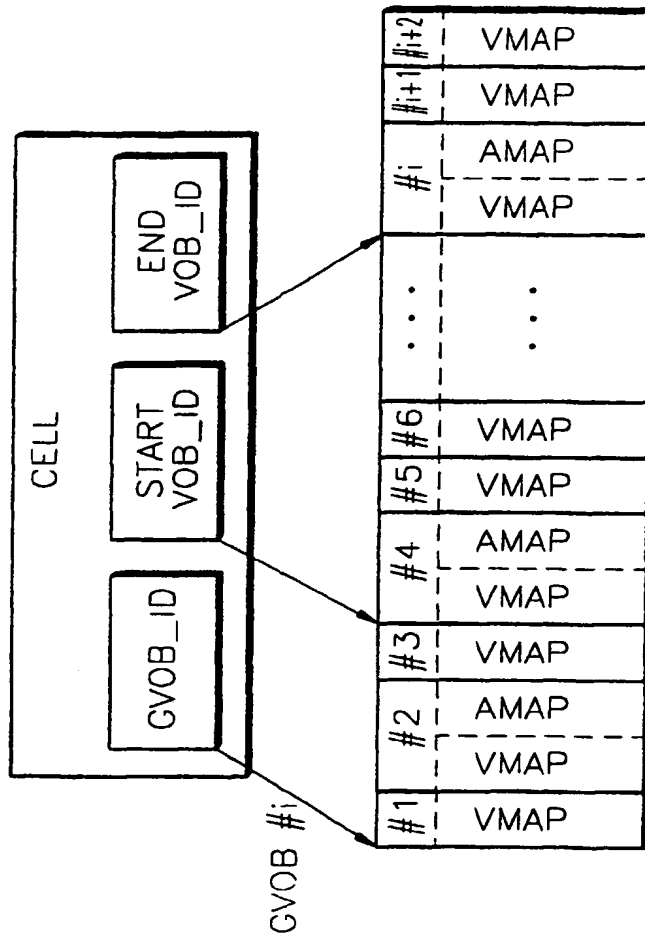


FIG. 8

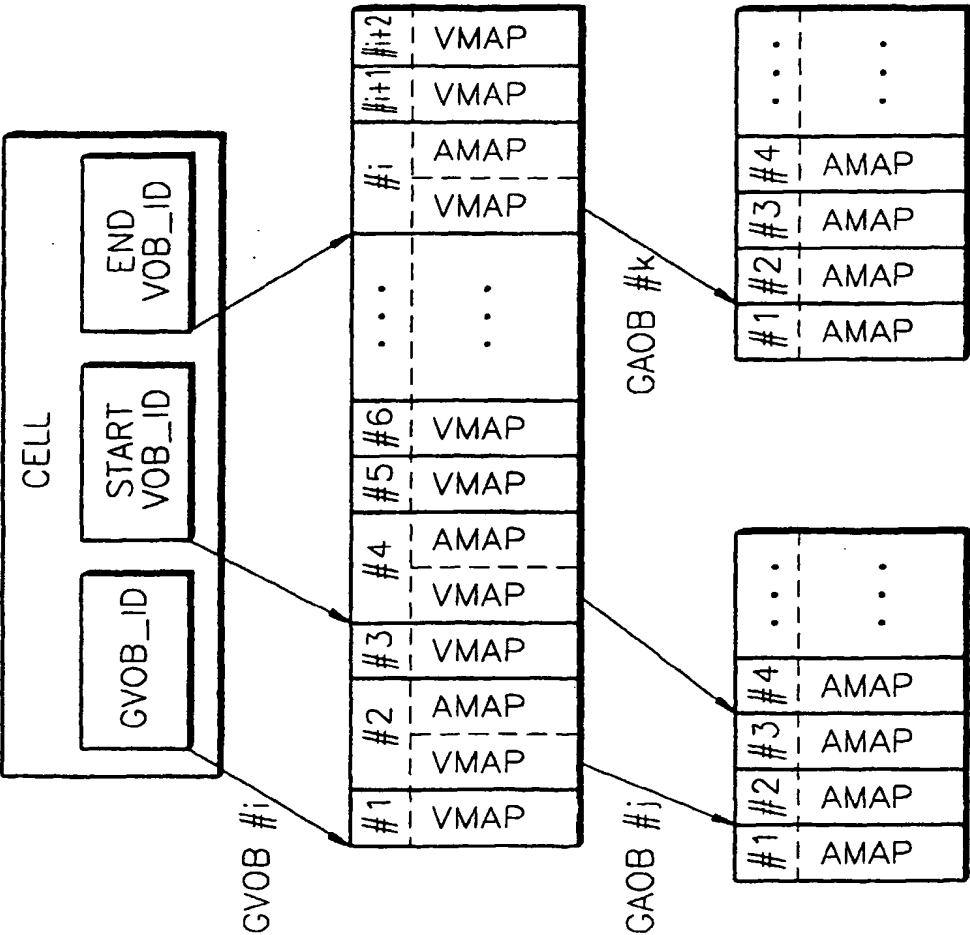


FIG. 9

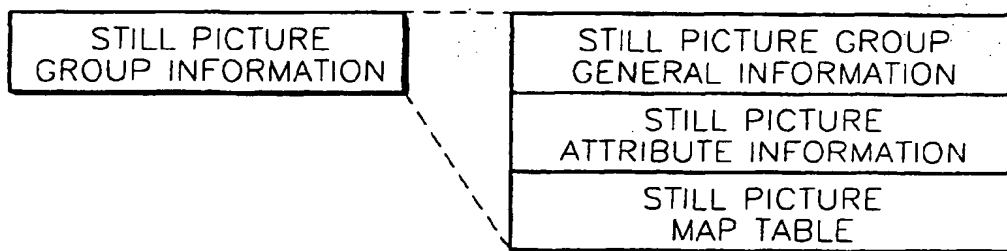


FIG. 10

	Contents	Number of Bytes
	Reserved	2 bytes
GVOB_ID	VOB Group ID	2 bytes
GVOB_S_ADR	Start address of VOB Group	4 bytes
GVOB_Ns	Number of Video Parts	1 byte

FIG. 11

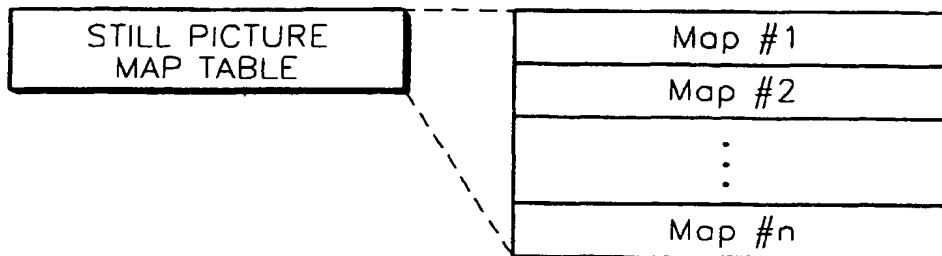


FIG. 12

	Contents	Number of Bytes
MAP_TY	Map type	1 bit
VOB_ID	VOB ID	7 bits
V_PART_SZ	Size of Video part	1 byte
GAOB_ID	GAOB ID for after_recorded audio	12 bits
AOB_ID	AOB ID for after_recorded audio	1 byte

FIG. 13

	Contents	Number of Bytes
MAP_TY	Map type	1 bit
	Reserved	7 bits
A_PBTM	Playback Time of Audio	2 bytes
A_PART_SZ	Size of Audio part	2 bytes

FIG. 14

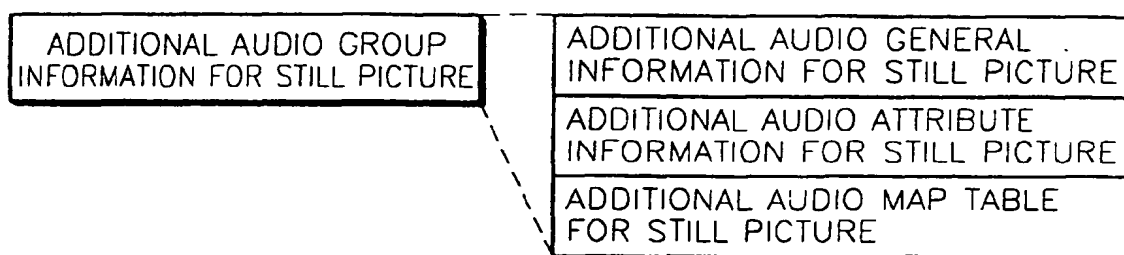


FIG. 15

	Contents	Number of Bytes
	Reserved	2 bytes
GAOB_ID	AOB Group ID	2 bytes
GAOB_S_ADR	Start address of AOB Group	4 bytes
GAOB_Ns	Number of Audio Parts	1 byte

FIG. 16

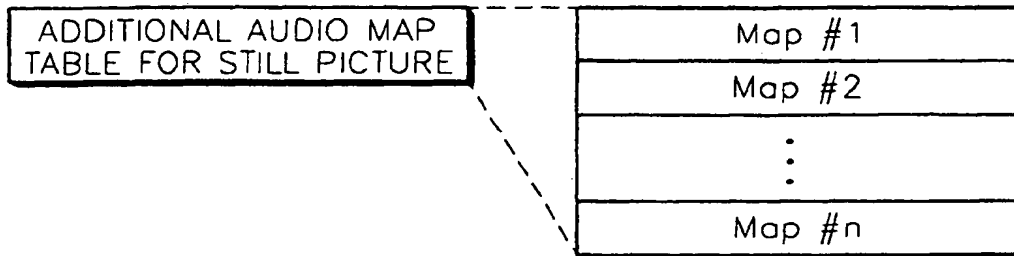


FIG. 17

	Contents	Number of Bytes
AOB_ID	AOB ID	7 byte
A_PBTM	Playback Time of Audio	2 bytes
A_PART_SZ	Size of Audio Part	2 bytes

FIG. 18

	Contents	Number of Bytes
S_GVOB_ID	VOB Group ID for Still Picture	2 bytes
S_VOB_ID	VOB ID for Start Still Picture	1 byte
E_VOB_ID	VOB ID for END Still Picture	1 byte
	Reserved	5 bytes

FIG. 19A

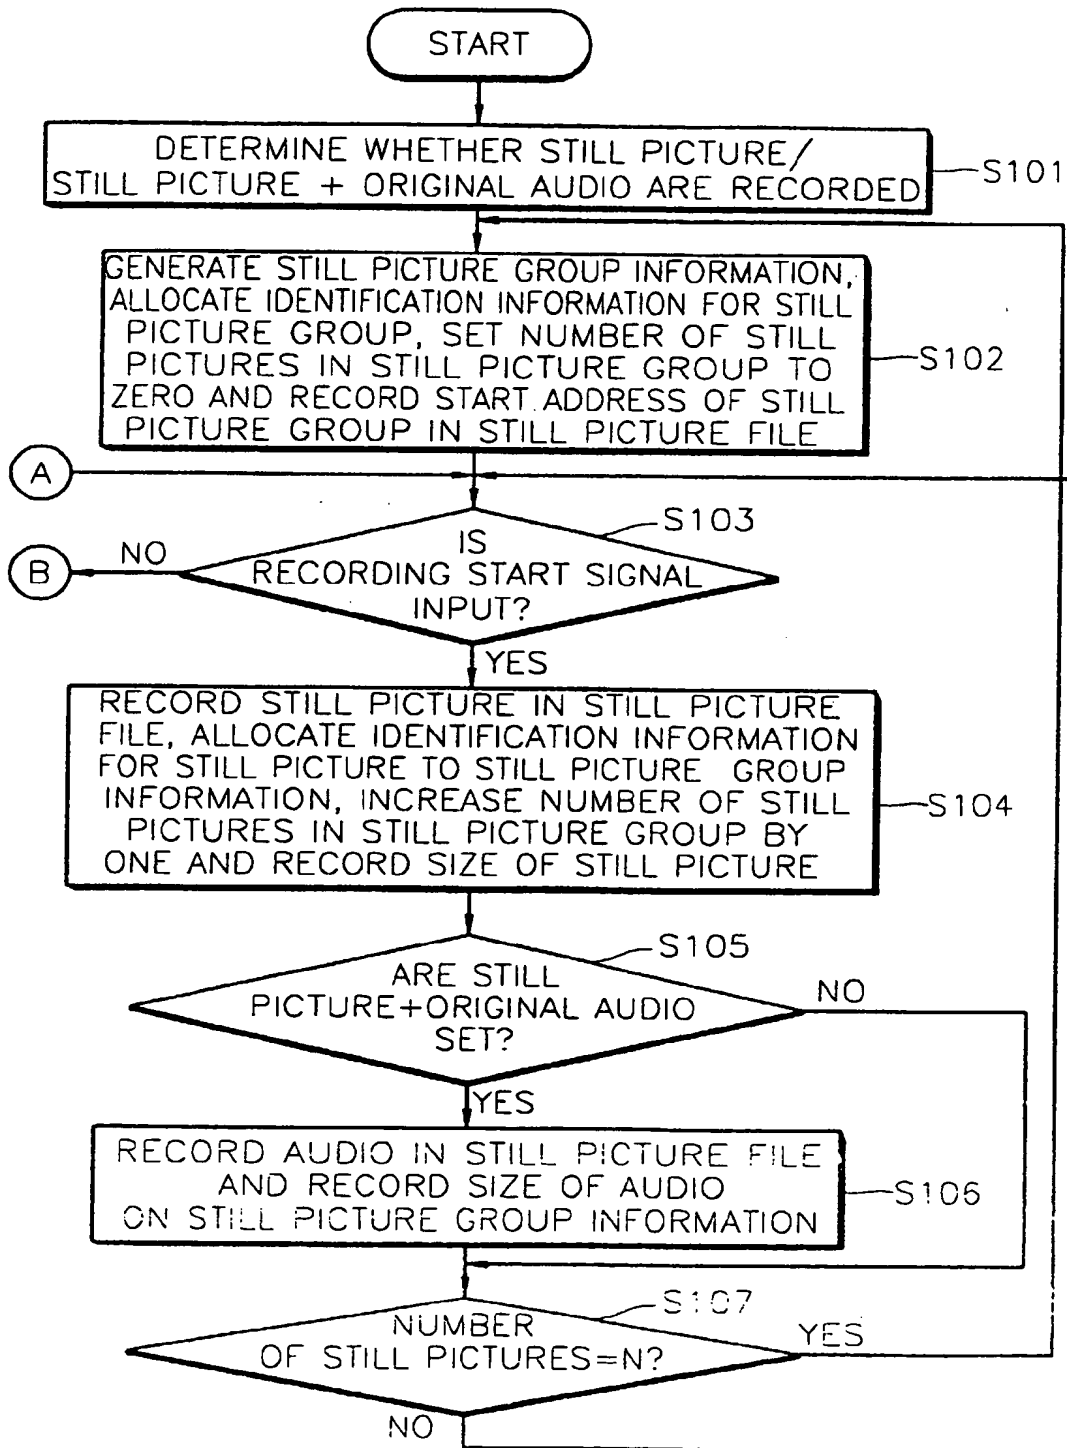




FIG. 19B

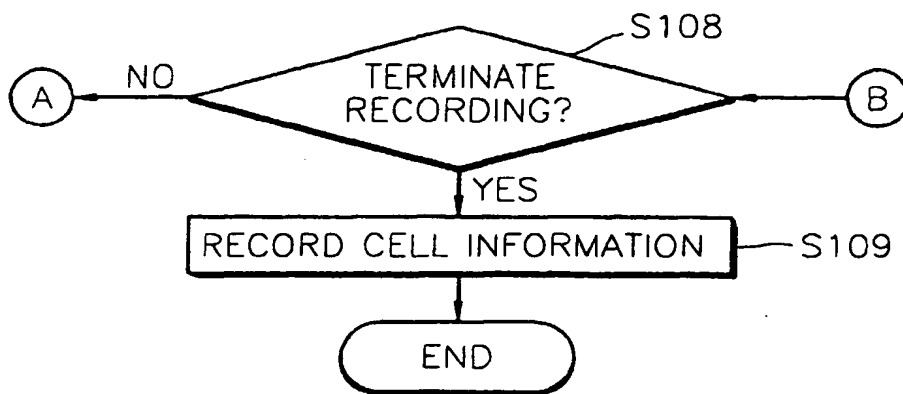


FIG. 20

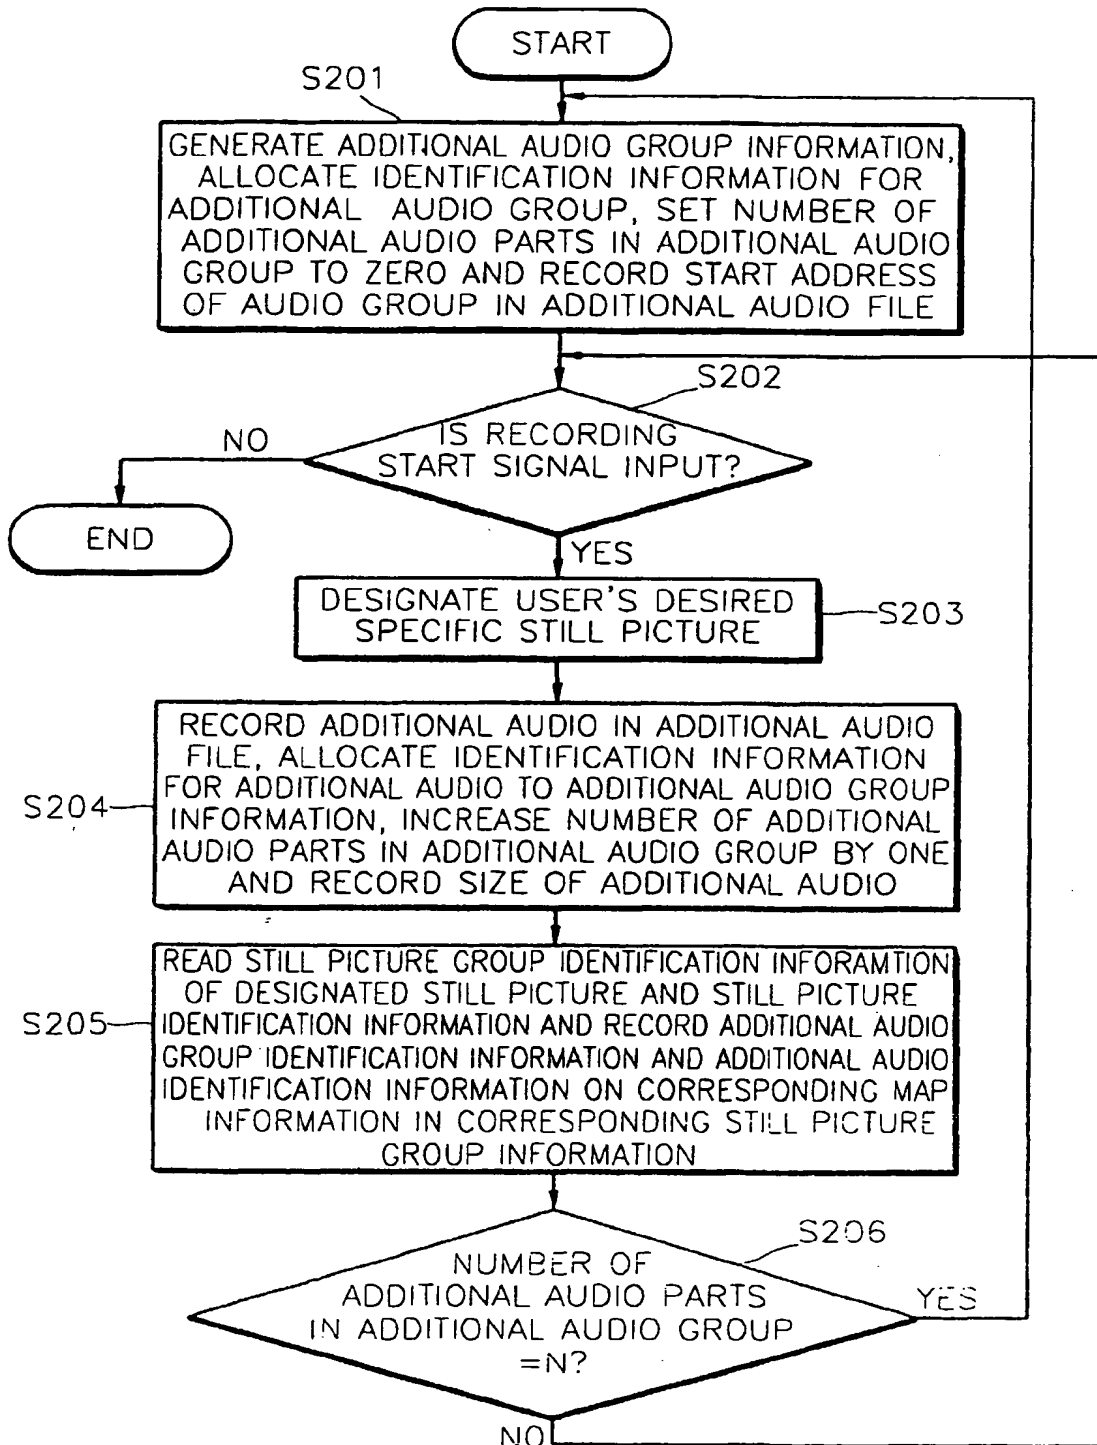


FIG. 21

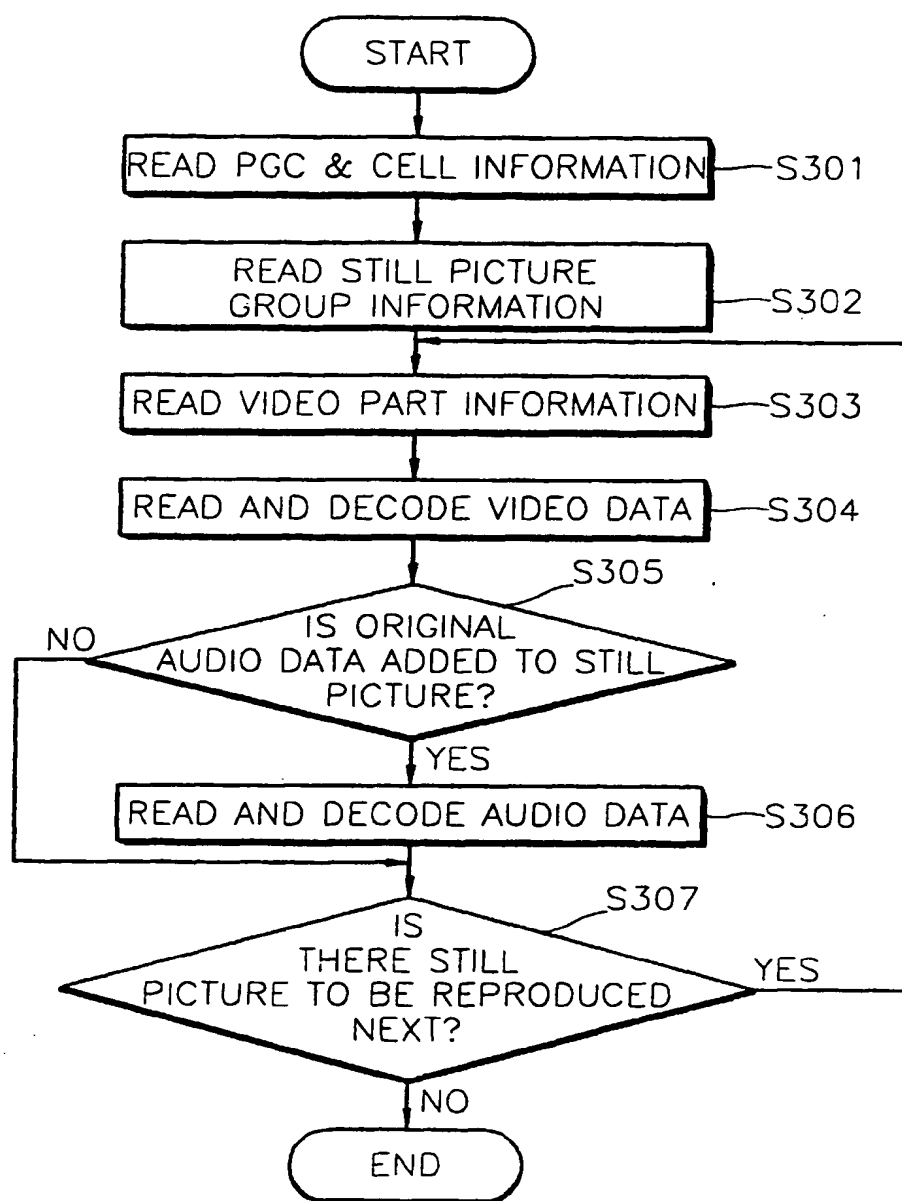


FIG. 22A


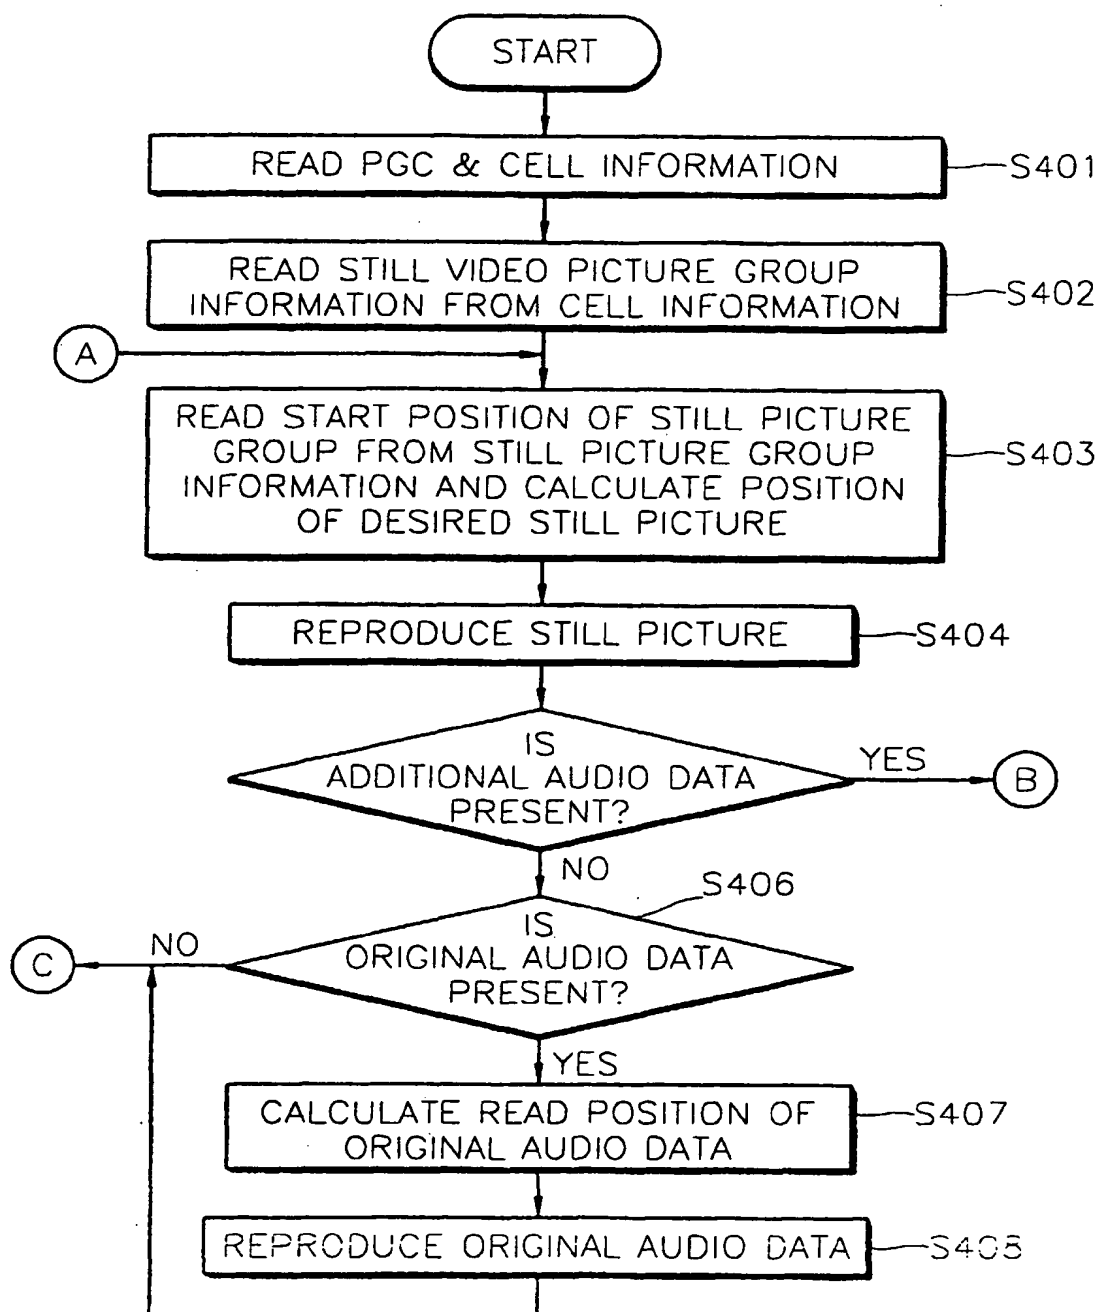


FIG. 22B



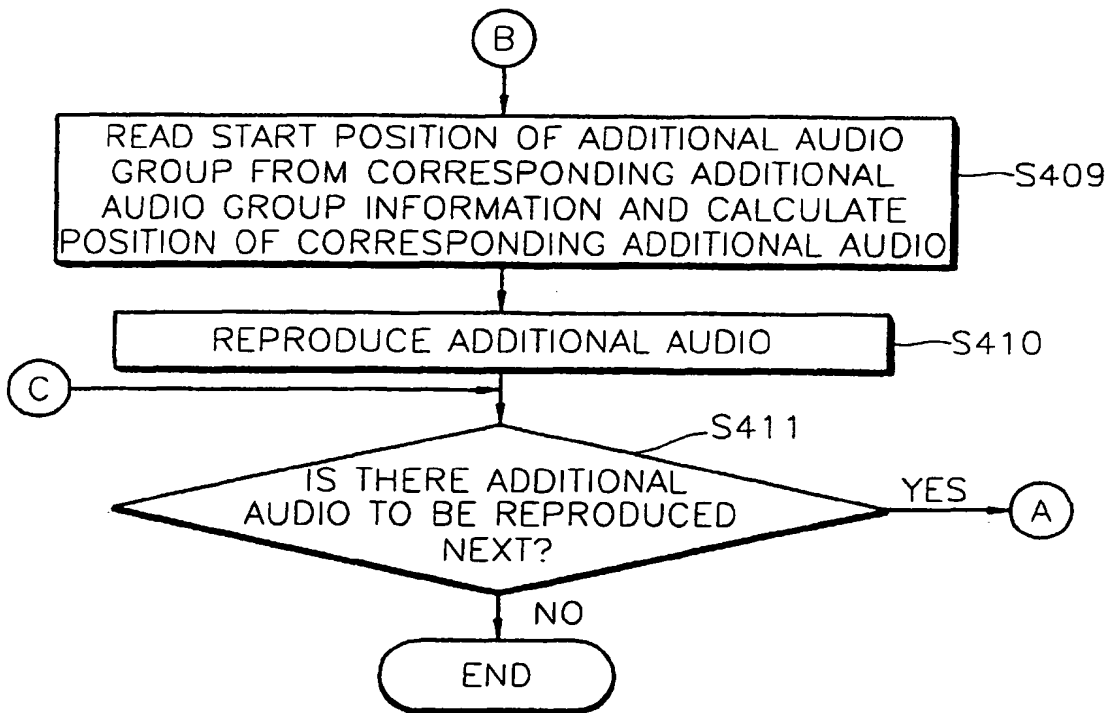

European Patent  
Office

# EUROPEAN SEARCH REPORT

Application Number  
EP 99 30 4944

DOCUMENTS CONSIDERED TO BE RELEVANT			
Category	Citation of document with indication, where appropriate, of relevant passages	Relevant to claim	CLASSIFICATION OF THE APPLICATION (Int.Cl.6)
X	US 5 555 098 A (PARULSKI KENNETH A) 10 September 1996 (1996-09-10)	1, 2, 4, 17, 19, 20, 22, 44, 45, 53, 54, 57, 63	G11B20/12 G11B27/32
A	* abstract * * column 1, line 11 - line 16 * * column 5, line 10 - line 23 * * column 7, line 6 - column 8, line 22 * * figures 3, 4 *	6, 7, 12, 13, 18, 21, 24, 26, 27, 30, 33, 34, 36, 46, 49, 58, 62	
A	EP 0 295 148 A (SONY CORP) 14 December 1988 (1988-12-14) * page 2, line 1 - page 3, line 3 * * page 4, line 11 - line 19 * * page 5, line 12 - line 18 * * page 6, line 4 - page 7, line 49 *	1, 26, 53	TECHNICAL FIELDS SEARCHED (Int.Cl.6)  G11B H04N
A	EP 0 689 206 A (SONY CORP) 27 December 1995 (1995-12-27) * figures 1, 9 * * page 3, line 31 - line 36 * * page 4, line 39 - line 54 * * page 7, line 51 - line 53 * * page 10, line 1 - line 50 *	1, 4-7, 20	
The present search report has been drawn up for all claims			
Place of search THE HAGUE		Date of completion of the search 20 September 1999	Examiner Ogor, M
<p>CATEGORY OF CITED DOCUMENTS</p> <p>X : particularly relevant if taken alone Y : particularly relevant if combined with another document of the same category A : technological background O : non-written disclosure P : intermediate document</p> <p>T : theory or principle underlying the invention E : earlier patent document, but published on, or after the filing date D : document cited in the application L : document cited for other reasons &amp; : member of the same patent family, corresponding document</p>			

EPO FORM 1503 03 82 (PDC01)



European Patent  
Office

# EUROPEAN SEARCH REPORT

Application Number  
EP 99 30 4944

DOCUMENTS CONSIDERED TO BE RELEVANT			
Category	Citation of document with indication, where appropriate, of relevant passages	Relevant to claim	CLASSIFICATION OF THE APPLICATION (Int.Cl.6)
A	EP 0 730 272 A (TOKYO SHIBAURA ELECTRIC CO) 4 September 1996 (1996-09-04)  * column 20, line 54 - column 21, line 18 * * column 23, line 4 - line 30 * * figures 6,16-24,28,31 *	1,4,20, 26,27, 53,57,58	
A	PATENT ABSTRACTS OF JAPAN vol. 098, no. 002, 30 January 1998 (1998-01-30) & JP 09 259536 A (SANYO ELECTRIC CO LTD), 3 October 1997 (1997-10-03) * abstract *		
			TECHNICAL FIELDS SEARCHED (Int.Cl.6)
The present search report has been drawn up for all claims			
Place of search <b>THE HAGUE</b>		Date of completion of the search <b>20 September 1999</b>	Examiner <b>Ogor, M</b>
<p><b>CATEGORY OF CITED DOCUMENTS</b></p> <p>X : particularly relevant if taken alone Y : particularly relevant if combined with another document of the same category A : technological background O : non-written disclosure P : intermediate document</p> <p>T : theory or principle underlying the invention E : earlier patent document, but published on, or after the filing date D : document cited in the application L : document cited for other reasons &amp; : member of the same patent family, corresponding document</p>			

EPO FORM 1503 03/02 (P)(C01)

**ANNEX TO THE EUROPEAN SEARCH REPORT  
ON EUROPEAN PATENT APPLICATION NO.**

EP 99 30 4944

This annex lists the patent family members relating to the patent documents cited in the above-mentioned European search report.  
The members are as contained in the European Patent Office EDP file on  
The European Patent Office is in no way liable for these particulars which are merely given for the purpose of information.

20-09-1999

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
US 5555098 A	10-09-1996	CA 2081762 A	06-06-1993
		EP 0545446 A	09-06-1993
		JP 5336478 A	17-12-1993
		JP 6020443 A	28-01-1994
EP 0295148 A	14-12-1988	JP 63308705 A	16-12-1988
		JP 2569565 B	08-01-1997
		JP 63311602 A	20-12-1988
		AU 620036 B	13-02-1992
		AU 1752388 A	15-12-1988
		US 4947265 A	07-08-1990
		US 5038217 A	06-08-1991
EP 0689206 A	27-12-1995	US 5687160 A	11-11-1997
		CN 1119896 A	03-04-1996
		WO 9516262 A	15-06-1995
EP 0730272 A	04-09-1996	JP 8298645 A	12-11-1996
		US 5930450 A	27-07-1999
JP 09259536 A	03-10-1997	NONE	

EPO FORM P0439

For more details about this annex : see Official Journal of the European Patent Office, No. 12/82